

REVISION								
REV.	ECO	DESCRIPTION	INIT	DATE				
Α		ENGINEERING RELEASE	SPJ	01/27/2017				

DETAILS

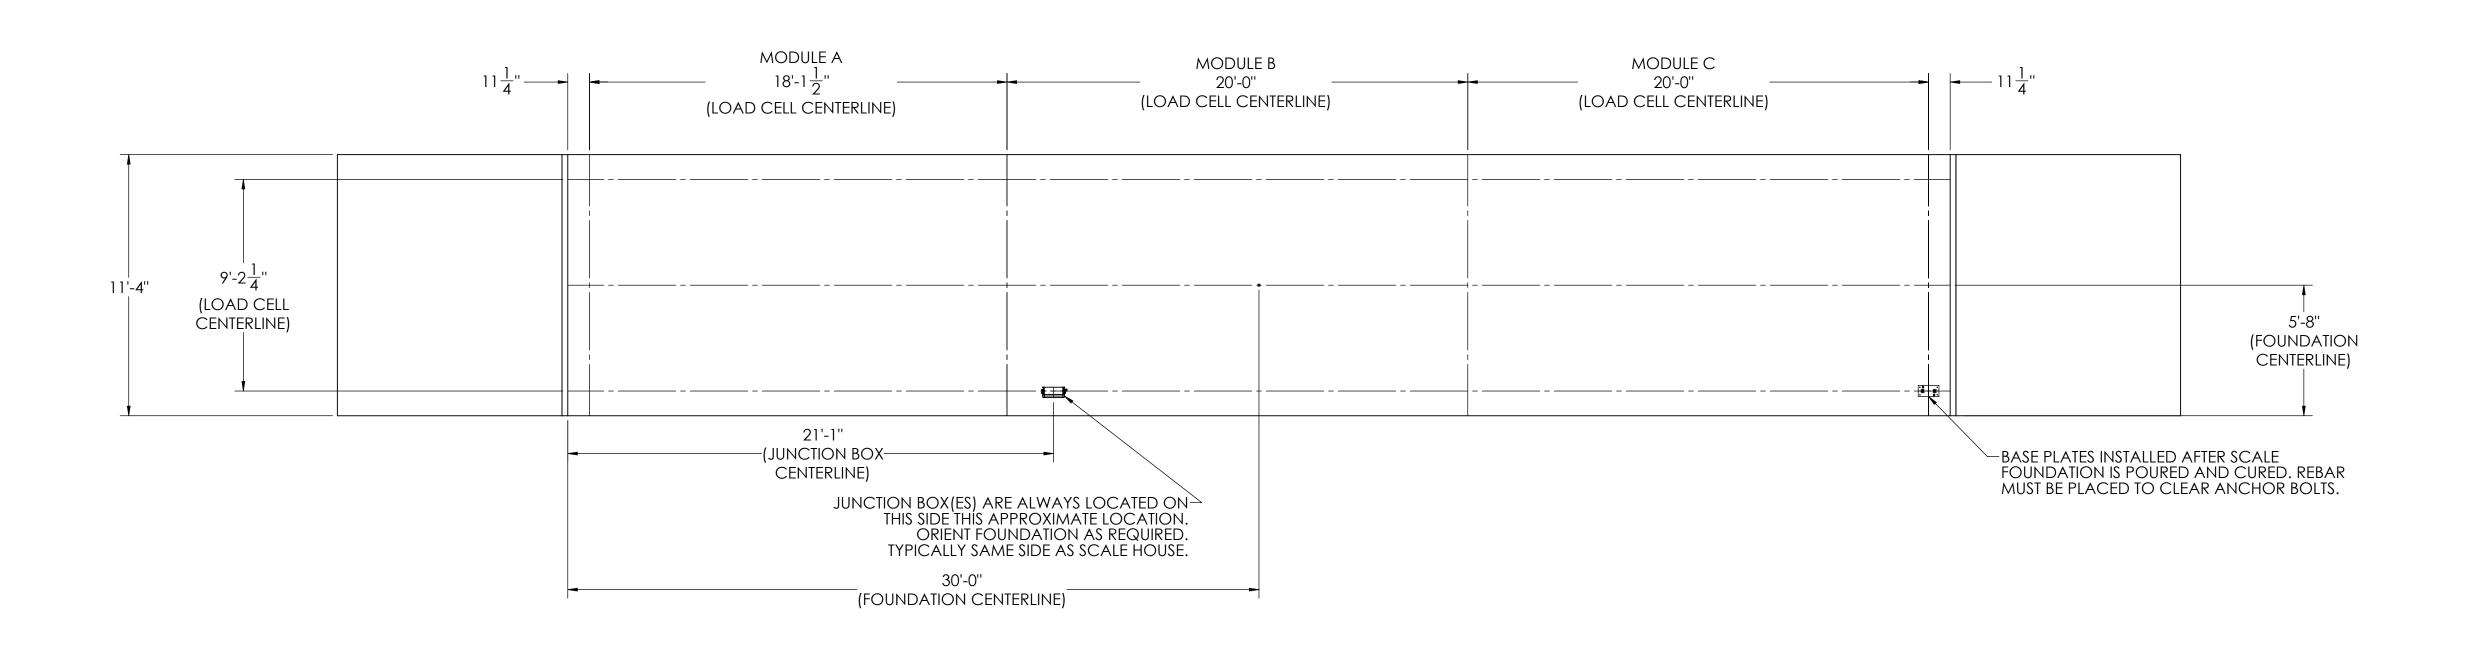

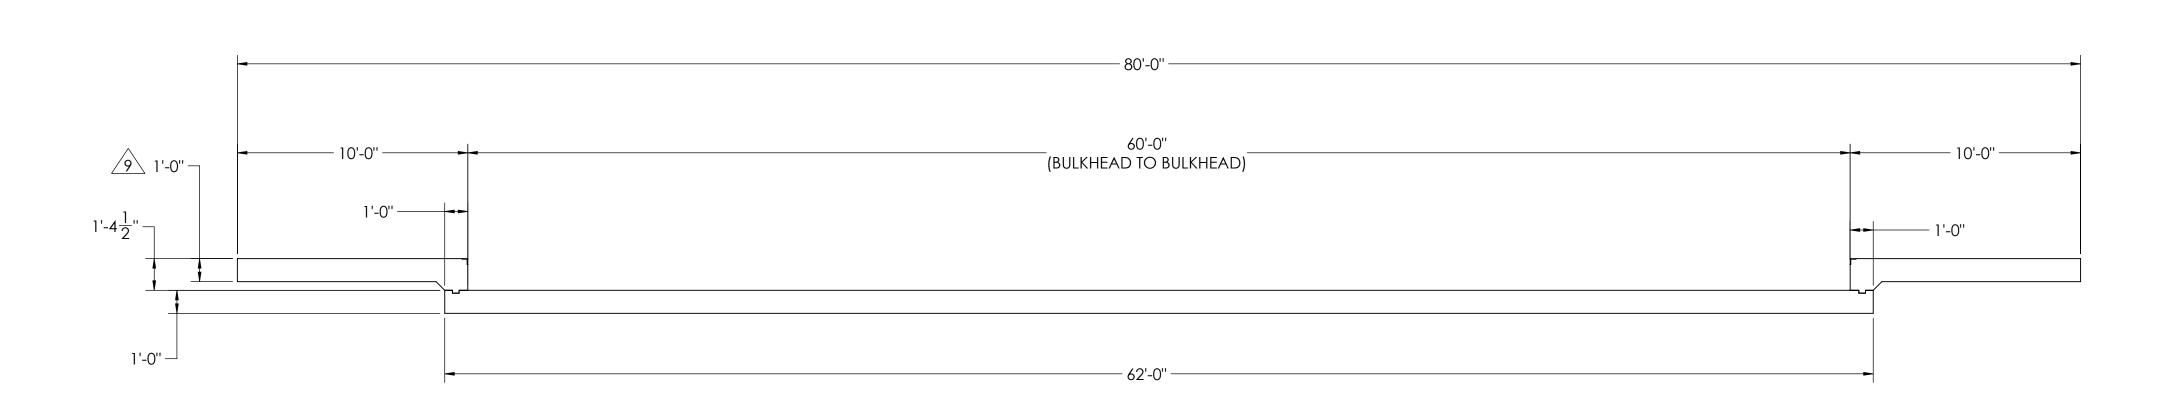

NOTES:

1) CONCRETE: f'c = 3000 PSI @ 28 DAYS.

2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60,

- 3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.
- 4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.
- 5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.
- 6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.
- 7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.
- 8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".

9 APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS


10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION


estimated weight (pounds)	.XXX: ± / ANGLE: ±	THIRD ANGLE PROJECTION P/N	180169 REV A1
MINIMUM CRANE CAPACITY:	DRAWING UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED UNLESS OTHERWISE SPECIFIED	1:50 SHEET 1 01	
NUMBER OF CRANES:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST. TOLERANCES NOT SCALE DRAWING TOLERANCES		ON, CONCRETE SLAB 60' X 11 SERIES TRUCK SCALE
reatment NONE	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	AFTER TREATMENT	WELCHING SYSTEMS
S.JOHNSON 01/27/2017	S.JOHNSON 01/27/2017	S.JOHNSON 08/17/2017	
DESIGNED BY / DATE	DRAWN BY / DATE	PEER APROVAL/ DATE	


CONCRETE SCHEDULE							
VOLUME (CUBIC Y		(CUBIC YARDS)					
	APPROACHE	s	8.8				
	FLOO	R	26.2				
	TOTA	L	35.0				
MISC. STEEL							
PIT COPING	3 X 3 X 1/4	23 LN .FT	113 LBS				


CONCRETE LAYOUT



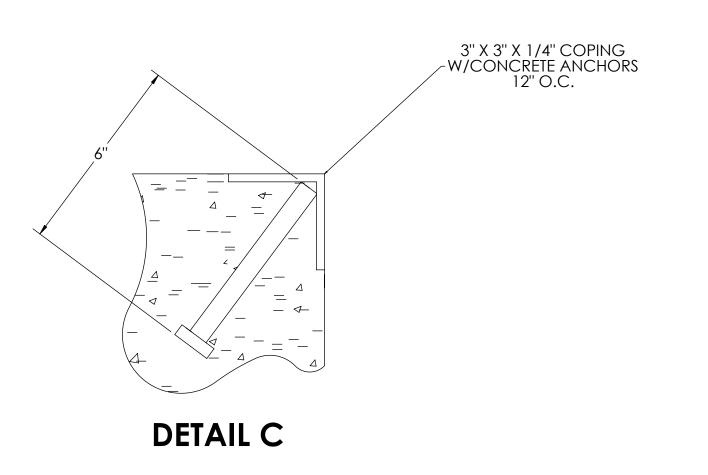

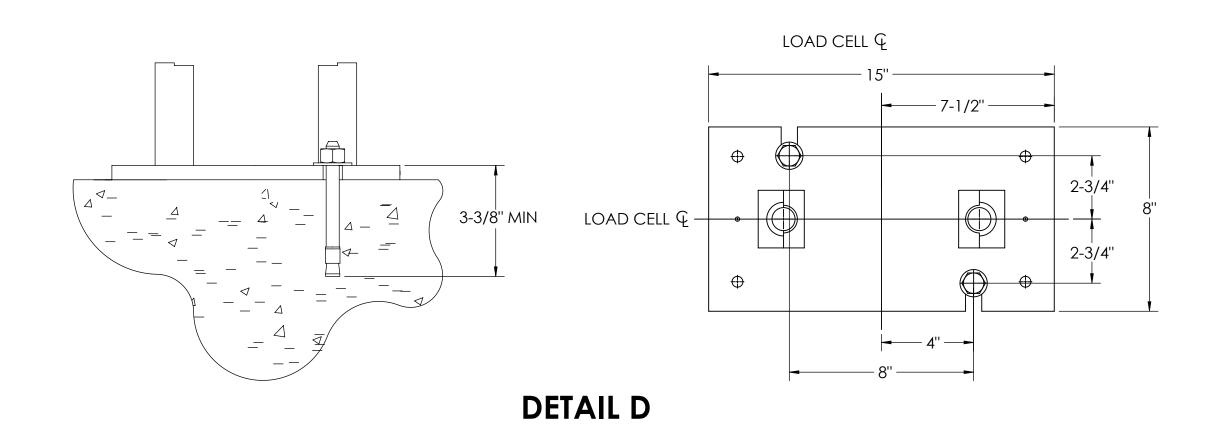

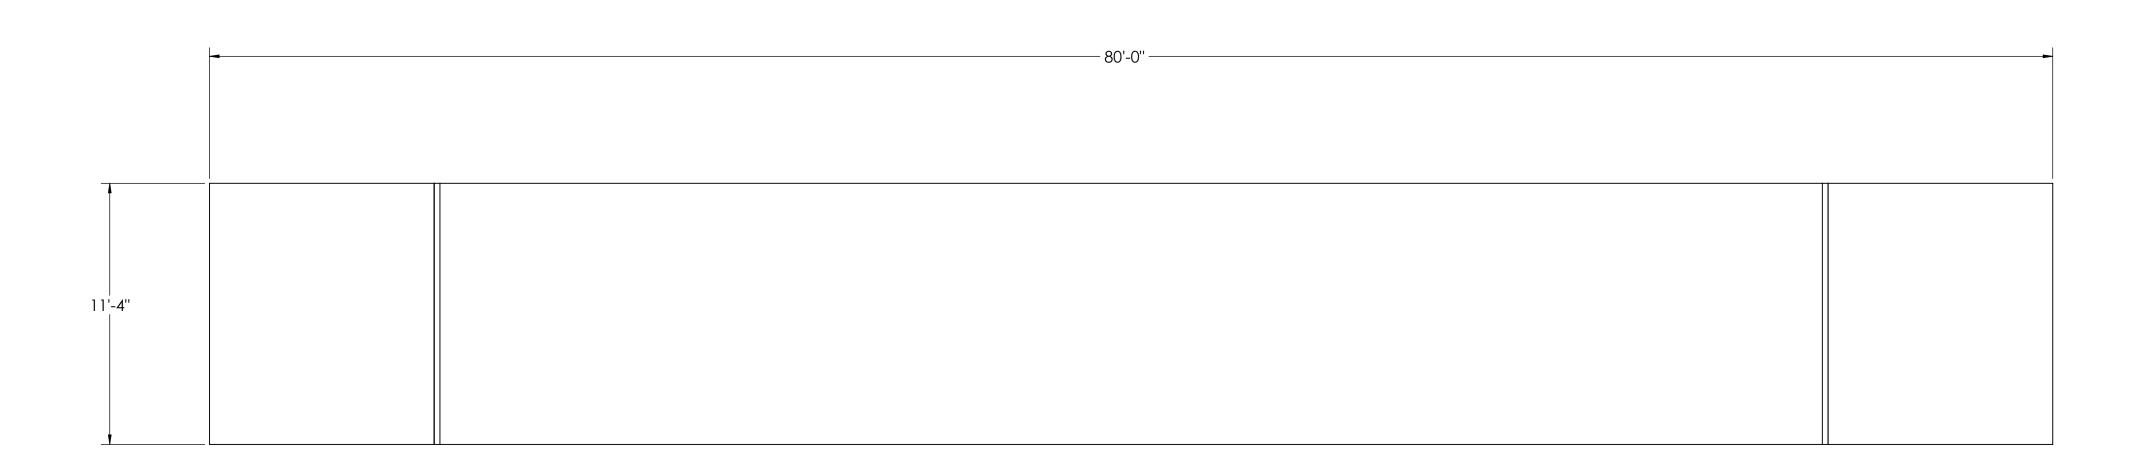

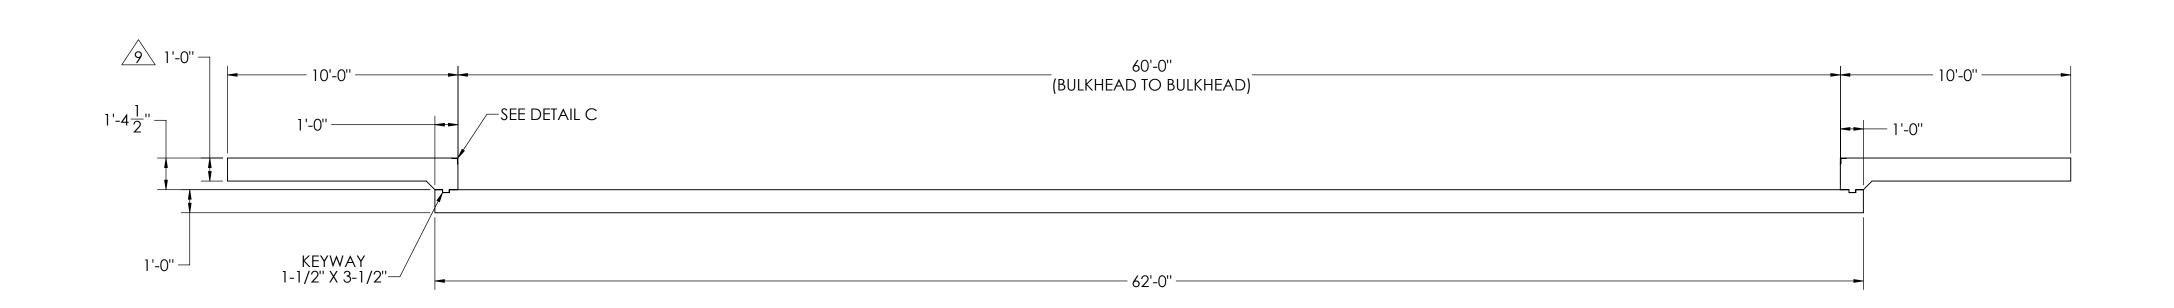

ESTIMATED WEIGHT (POUNDS)	✓ ANGLE: ±	THIRD ANGLE PROJECTION P/N	180169 REV A1	
MINIMUM CRANE CAPACITY: DR SU	RAWING UNLESS OTHERWISE SPECIFIED RFACE XX: ±	1:50 SHEET 2 OF	<u> </u>	
NUMBER OF CRANES:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST. TOLERANCES FOR SCALE DRAWING TOLERANCES	_		
NONE	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIEC	UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	WEIGHING SYSTEMS	
S.JOHNSON 01/27/2017	S.JOHNSON 01/27/2017	S.JOHNSON 08/17/2017		
DESIGNED BY / DATE	DRAWN BY / DATE	PEER APROVAL/ DATE		

| REBAR SCHEDULE | | BAL. NO. | QUANTITY | LENGTH (FT-IN.) | DESCRIPTION | WEIGHT | | A | 24 | 9'6" | # 4 @ 12 O.C. | 152 | | B | 20 | 10'10" | # 4 @ 12 O.C. | 145 | | C | 24 | 1'71/2" | # 4 @ 12 O.C. | 26 | | D | 30 | 61'6" | # 4 AS SHOWN | 1232 | | E | 90 | 10'10" | # 4 AS SHOWN | 651 | | TOTAL WEIGHT OF REBAR (LBS.) | 2207

TOTAL LENGTH OF REBAR (FT.) 3304

REBAR LAYOUT

