


NOTES:

1) CONCRETE: f'c = 3000 PSI @ 28 DAYS.

- 2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60,
- 3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.
- 4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.
- 5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.
- 6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.
- 7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.
- 8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".
- 9 APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS

10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION

DETAILS

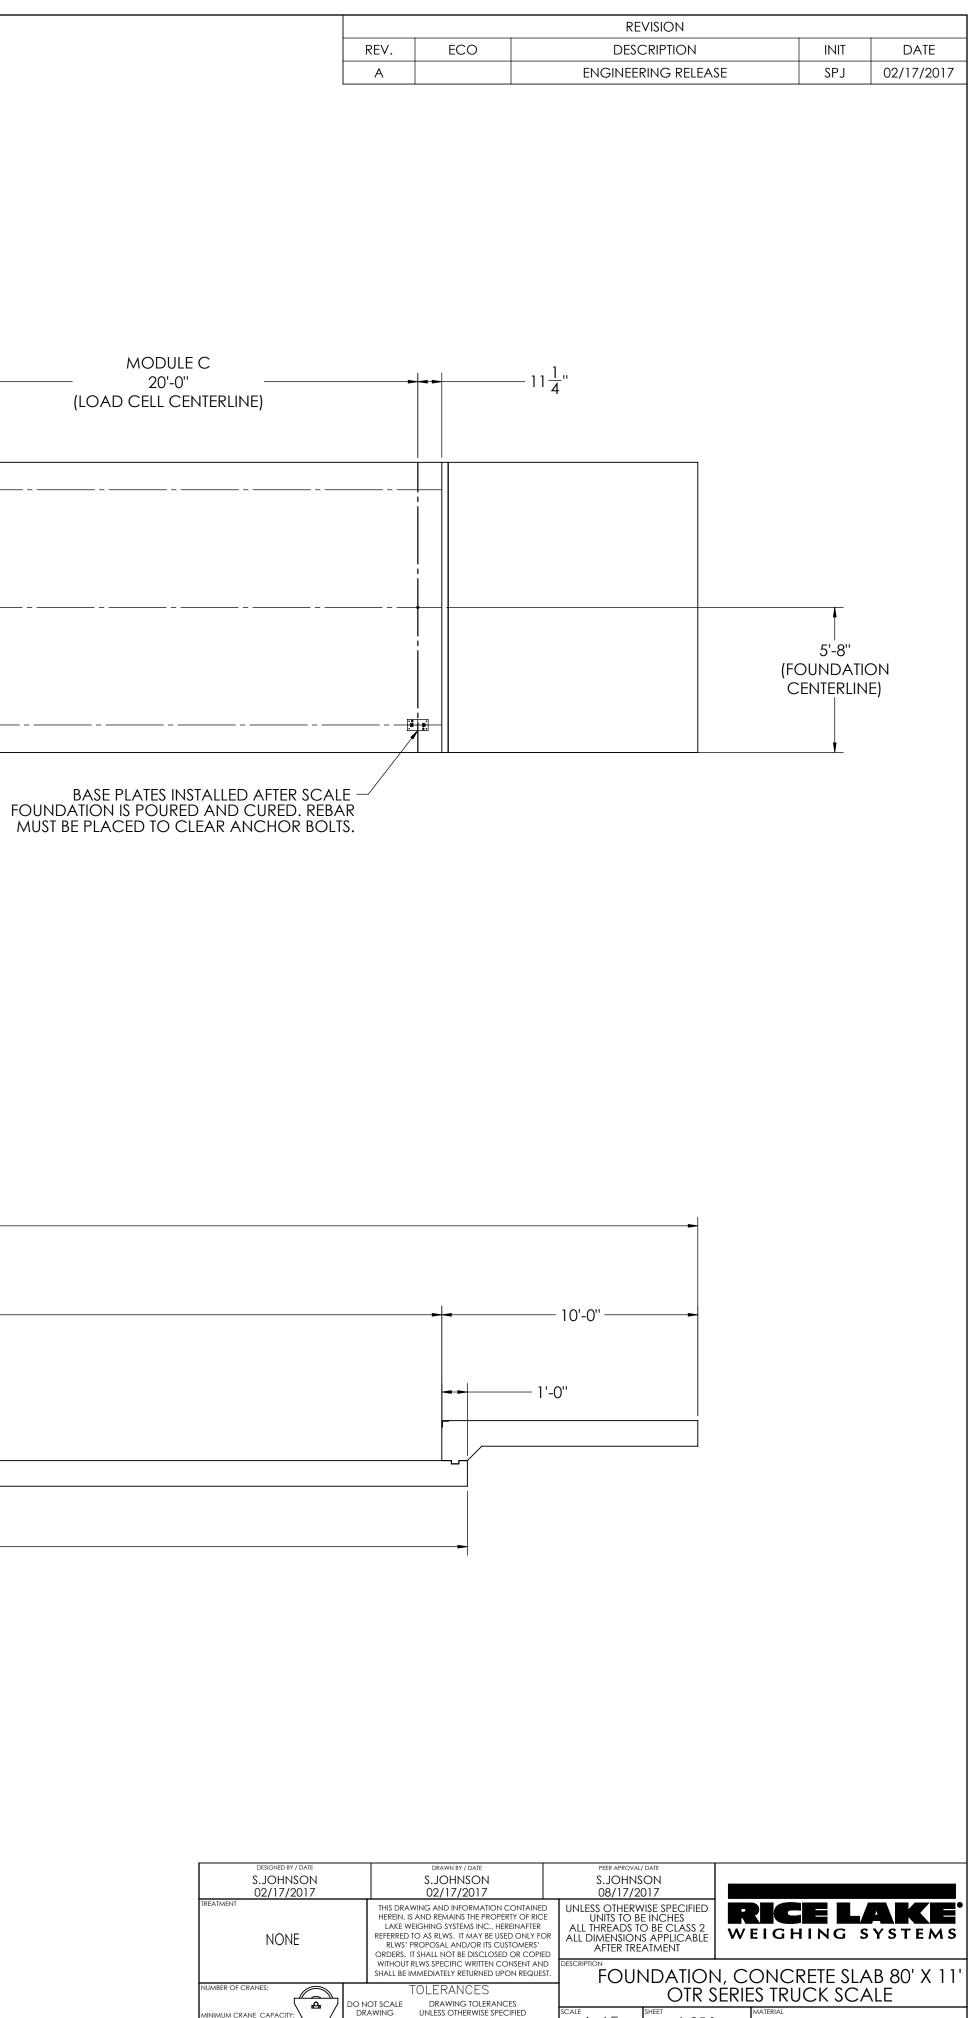

:45	1 OF 3	
	ion p/n -	180188

SURFACE

FINISH


.XX: ±


.XXX: ±


ANGLE: ±

A1


CONCRETE SCHEDULE				
VOLUME (CUBIC YAR				
APPROACHES 9.0				
FLOOR		34.7		
TOTAL		L	43.7	
MISC. STEEL				
PIT COPING	3 X 3 X 1/4	23 LN .FT	113 LBS	

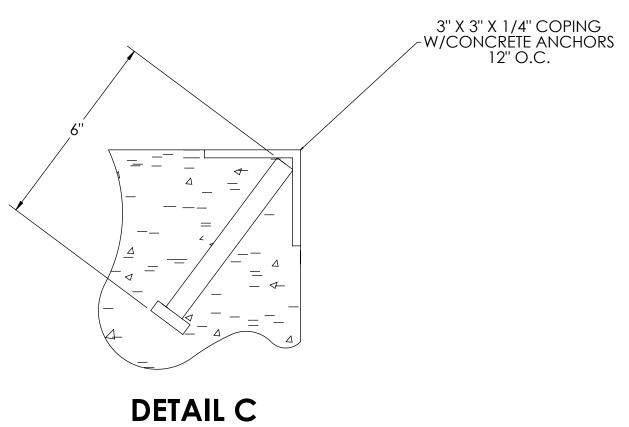

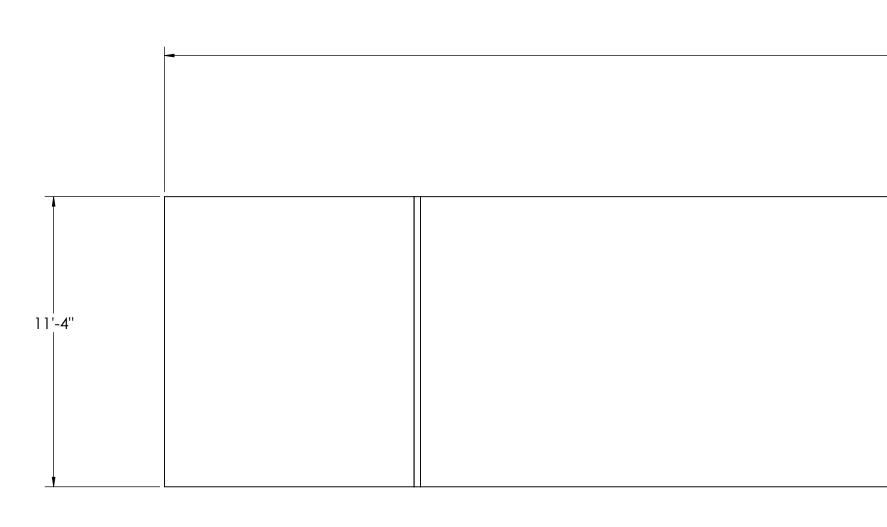

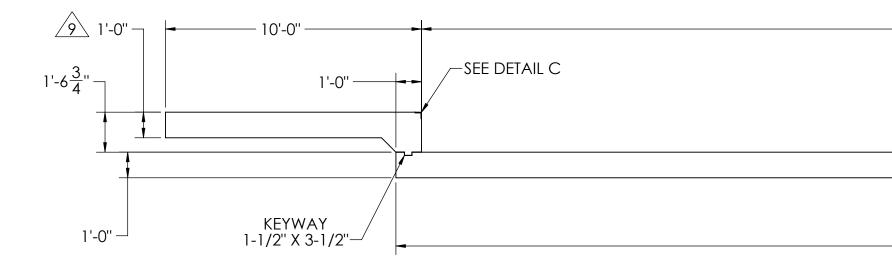

CONCRETE LAYOUT

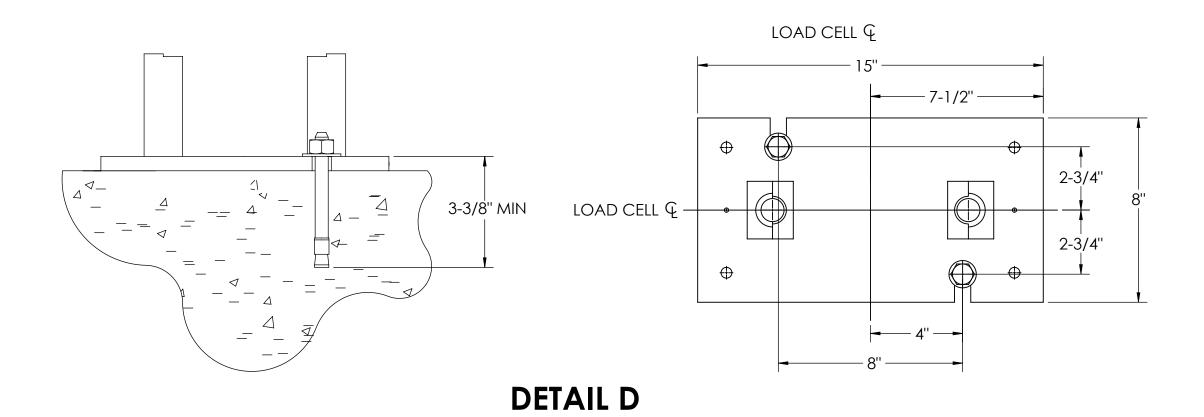



- 100'-0'' -

80'-0'' (BULKHEAD TO BULKHEAD)


— 82'-0'' —

revision				
REV	ECO	DESCRIPTION	INIT	DATE

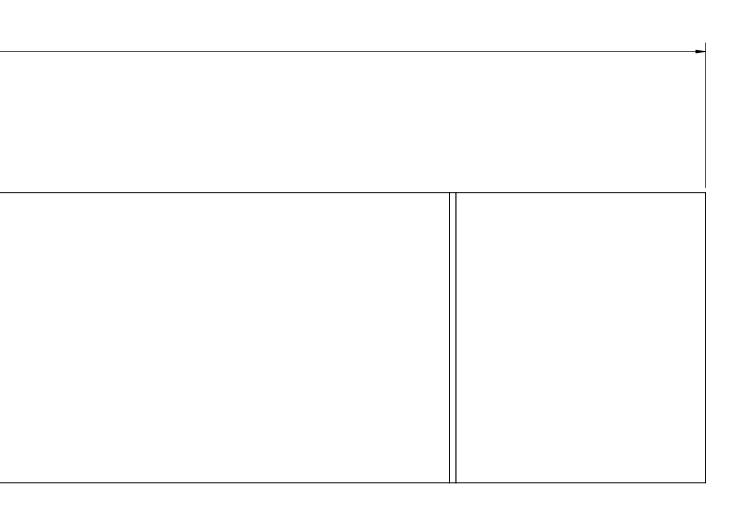

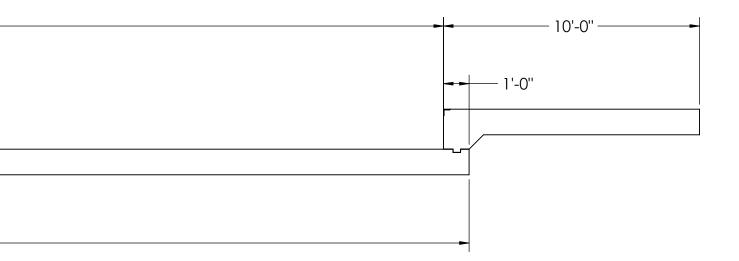


designed by / date S.JOHNSON 02/17/2017	drawn by / date S.JOHNSON 02/17/2017	peer aproval/date S.JOHNSON 08/17/2017	
NONE	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOF RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIEC	ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	RICE LAKE WEIGHING SYSTEMS
	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST TOLERANCES	FOUNDATIO	n, concrete slab 80' x 11' Series truck scale
	DRAWING UNLESS OTHERWISE SPECIFIED	1:45 SHEET 2 OF	3 MATERIAL
estimated weight (pounds)	\checkmark ANGLE: ±		180188 REV A1

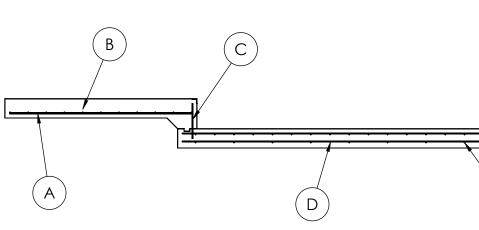


	MATERIAL REQUIRMENTS				
	REBAR SCHEDULE				
BAL. NO.	QUANTITY	LENGTH (FT-IN.)	DESCRIPTION	WEIGHT	
А	24	9' 6"	# 4 @ 12 O.C.	152	
В	22	10' 10''	# 4 @ 12 O.C.	159	
С	24	1'93/4"	# 4 @ 12 O.C.	29	
D	30	81' 6"	# 4 AS SHOWN	1633	
E	125	10' 10''	# 4 AS SHOWN	905	
TOTAL WEIGHT OF REBAR (LBS.)			2878		
TOTAL LENGTH OF REBAR (FT.)			4309		
TOTAL LENGTH OF REBAR (FT.)				4309	

	-
╽ <u>╷╷╷╷╷╷╷╷╷╢</u> ╪╣╴╴╸╸╸╸╸╸╸╸╸╸╸╸╸	—

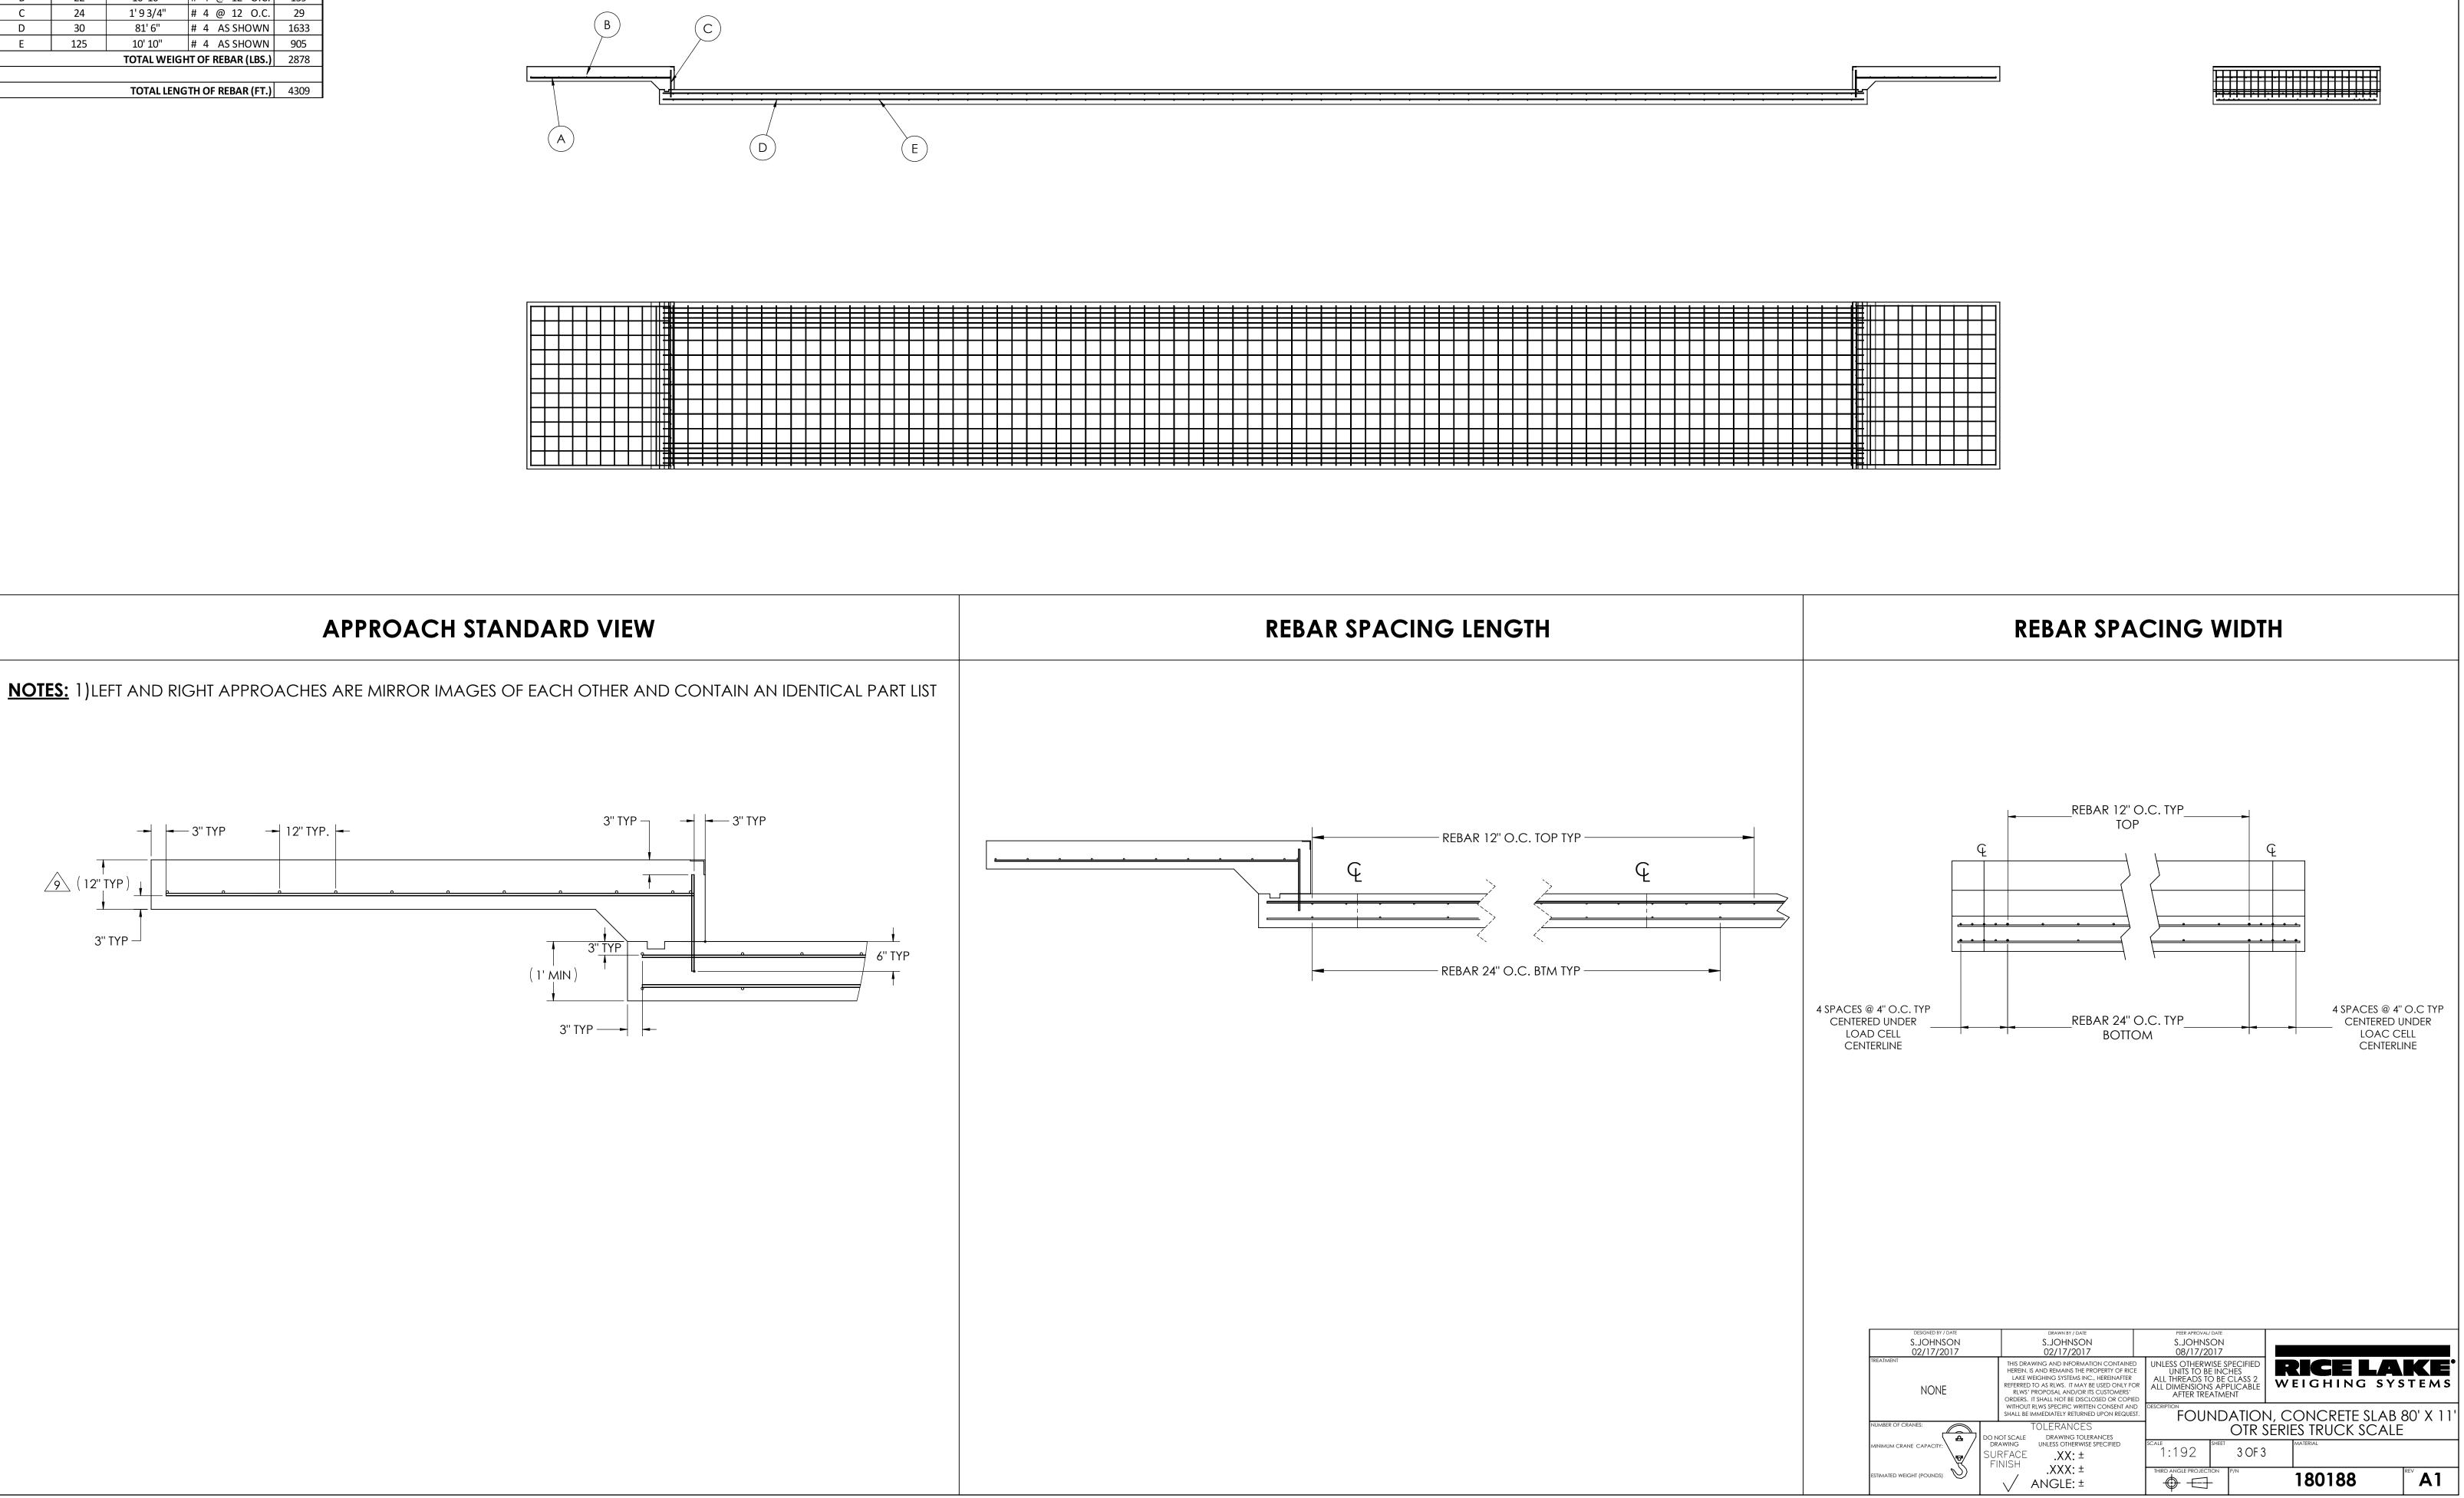

REBAR LAYOUT

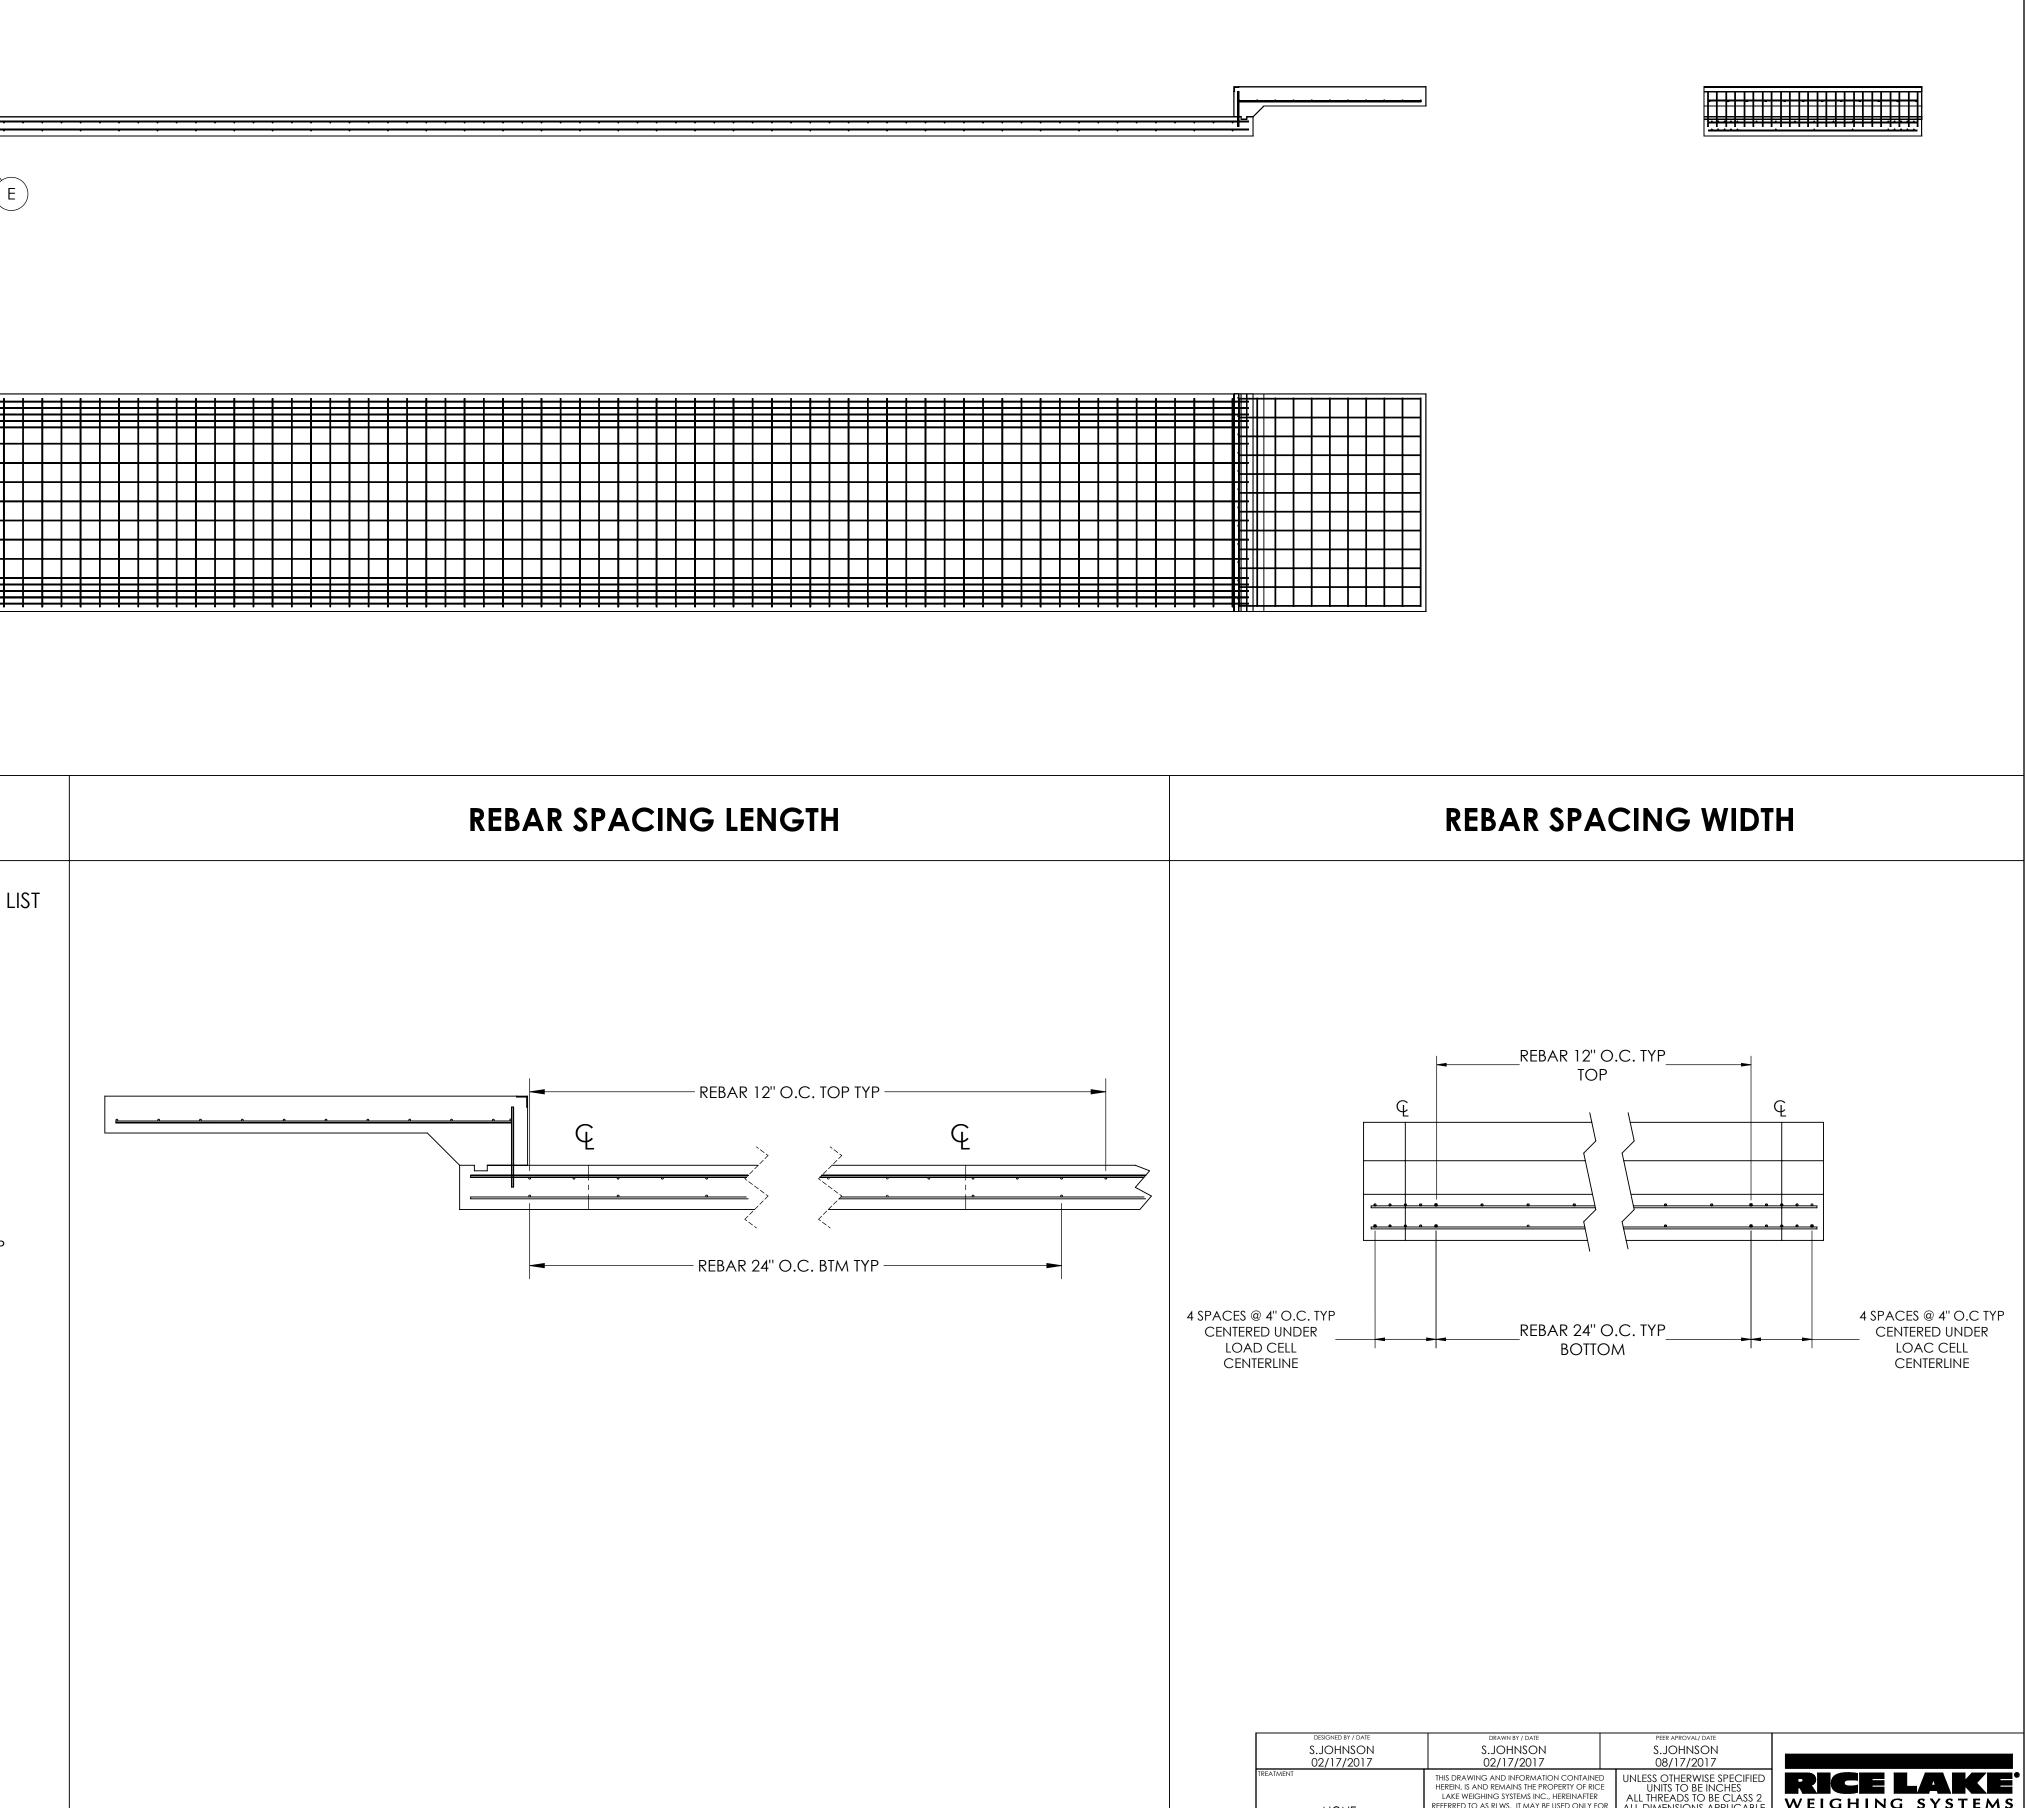

NONE	HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	UNITS TO BE INCHE ALL THREADS TO BE CL ALL DIMENSIONS APPLIC AFTER TREATMENT	ASS 2 CABLE WEIGHING SYST
	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST. TOLERANCES DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED SURFACE .XX: ± .XXX: ± .XXX: ± ANGLE: ±	SCALE SHEET	TION, CONCRETE SLAB 80 DTR SERIES TRUCK SCALE 3 OF 3 180188