




REVISION				
REV.	ECO	DESCRIPTION	INIT	DATE
A		ENGINEERING RELEASE	SPJ	01/27/2017

DETAILS

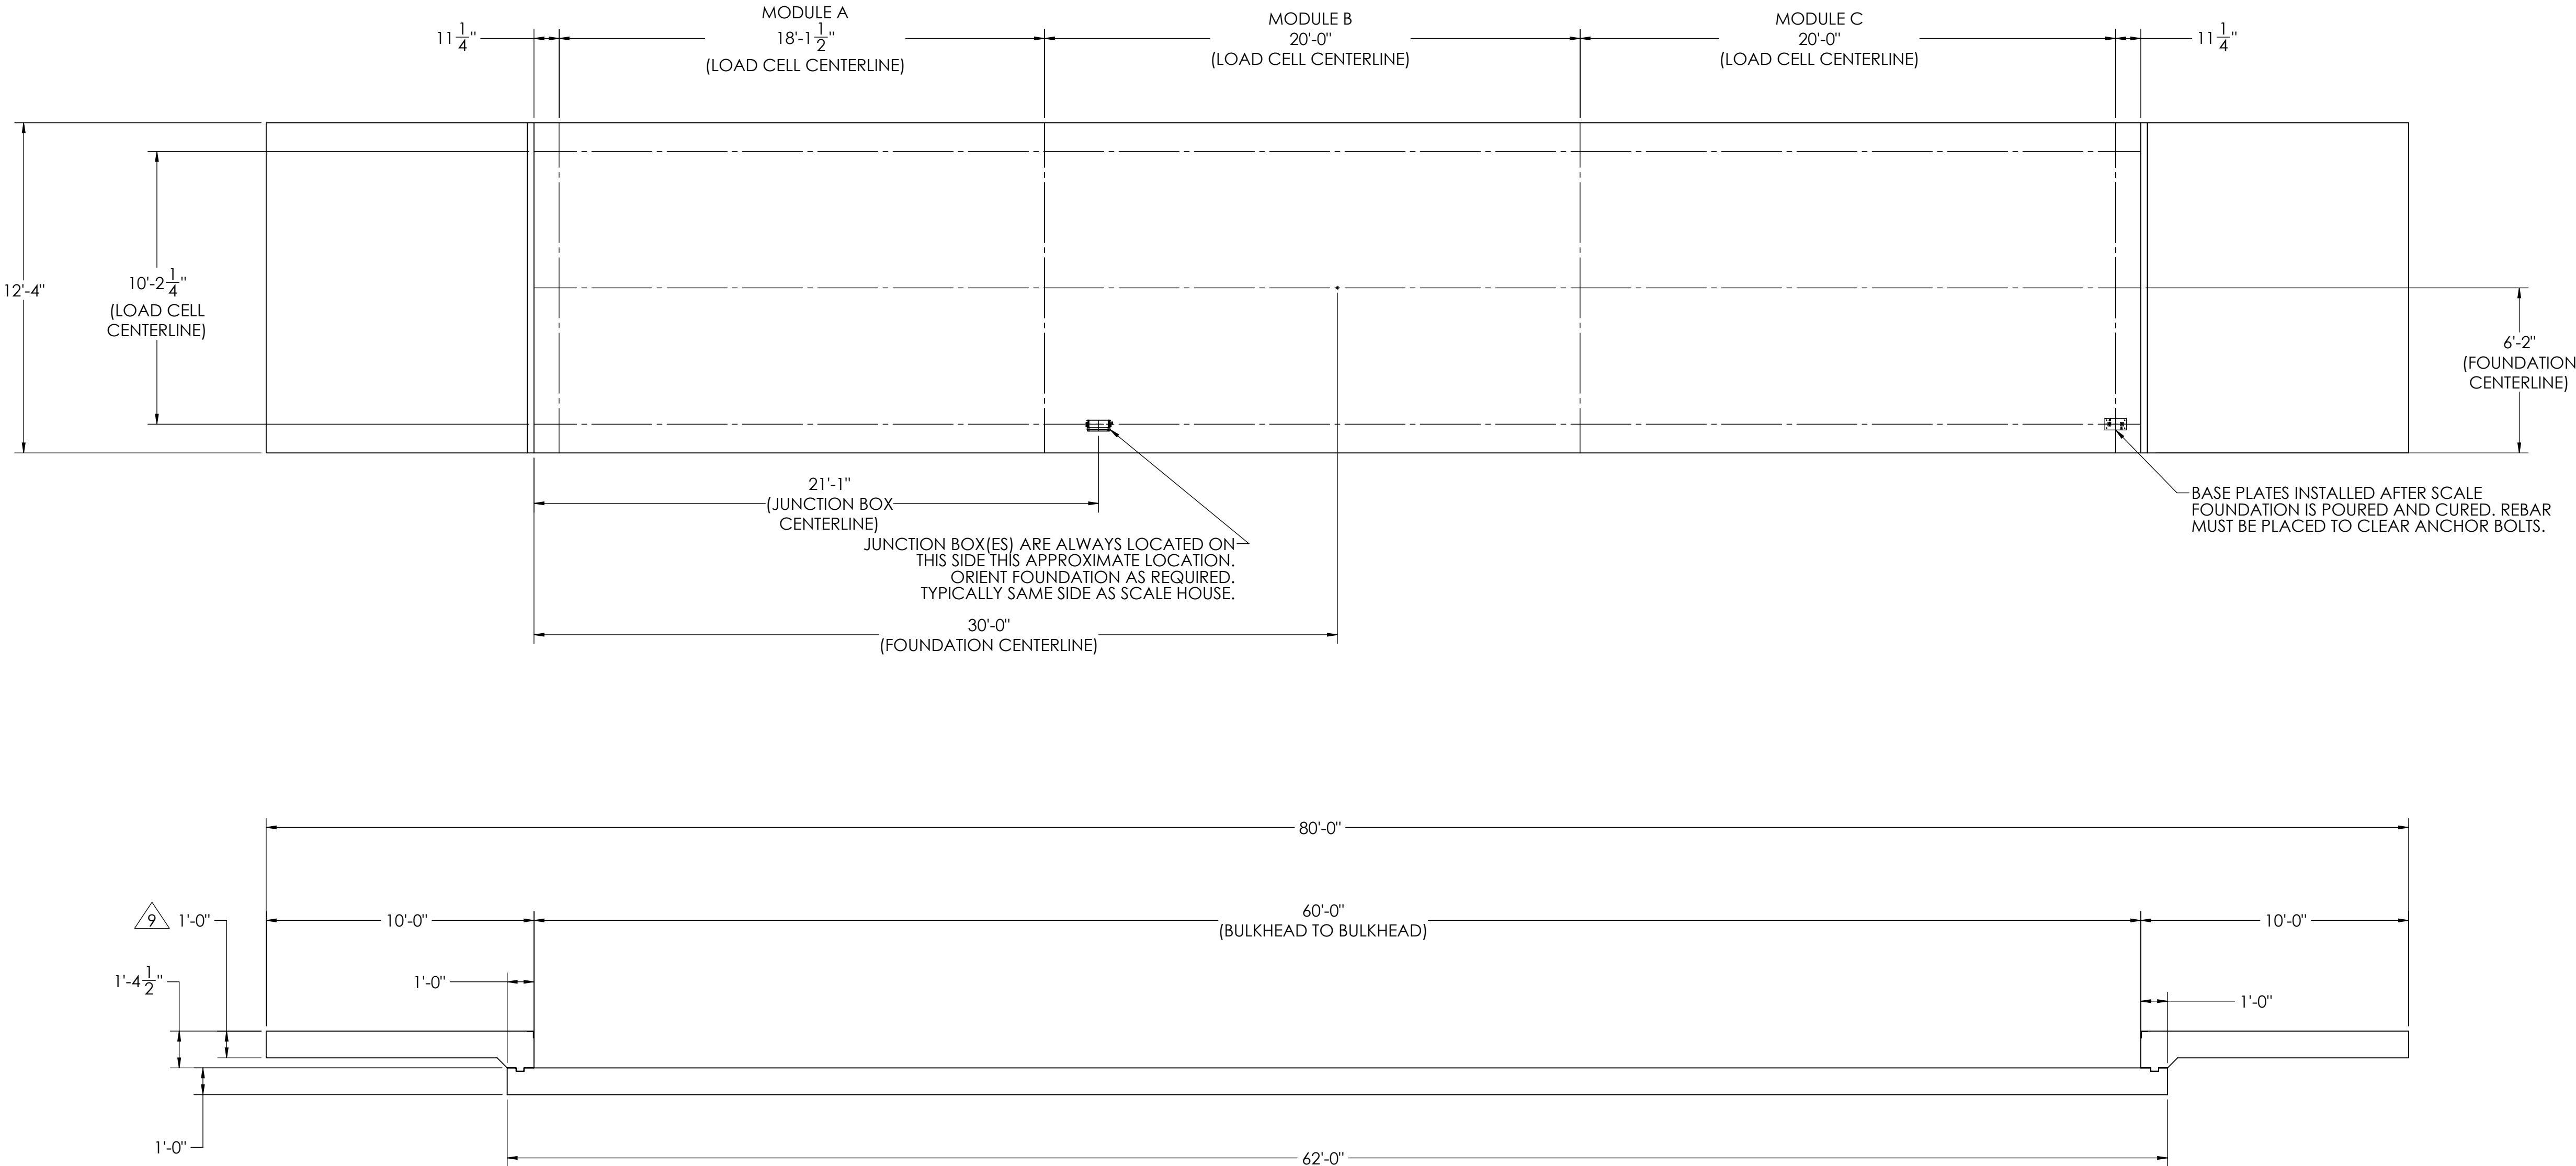


- NOTES:
- 1) CONCRETE: f_c = 3000 PSI @ 28 DAYS.
 - 2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60.
 - 3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.
 - 4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.
 - 5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.
 - 6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.
 - 7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.
 - 8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".
 - 9) APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS
 - 10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION

DESIGNED BY DATE S. JOHNSON 02/03/2017		DRAWN BY DATE S. JOHNSON 02/03/2017		FIELD APPROVAL DATE S. JOHNSON 08/24/2017		<div><div></div><div>RICE LAKE®</div><div>WEIGHING SYSTEMS</div></div>
TREATMENT NONE		THIS DRAWING AND INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC. - HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMER'S ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED WITHOUT RLWS' SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.		UNLESS OTHERWISE SPECIFIED UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT		
NUMBER OF CRANES: MINIMUM CRANE CAPACITY: ESTIMATED WEIGHT (POUNDS):		TOLERANCES DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED DO NOT SCALE SURFACE FINISH ✓ ANGLE: ±		DESCRIPTION FOUNDATION, CONCRETE SLAB 60' X 12' OTR SERIES TRUCK SCALE		
				SCALE 1:45 SHEET 1 OF 3 MATERIAL 180289 REV A1		


CONCRETE SCHEDULE			
VOLUME (CUBIC YARDS)			
APPROACHES			9.6
FLOOR			28.5
TOTAL			38.1
MISC. STEEL			
PIT COPING	3 X 3 X 1/4	25 LN .FT	123 LBS

CONCRETE LAYOUT




REVISION				
REV	ECO	DESCRIPTION	INIT	DATE

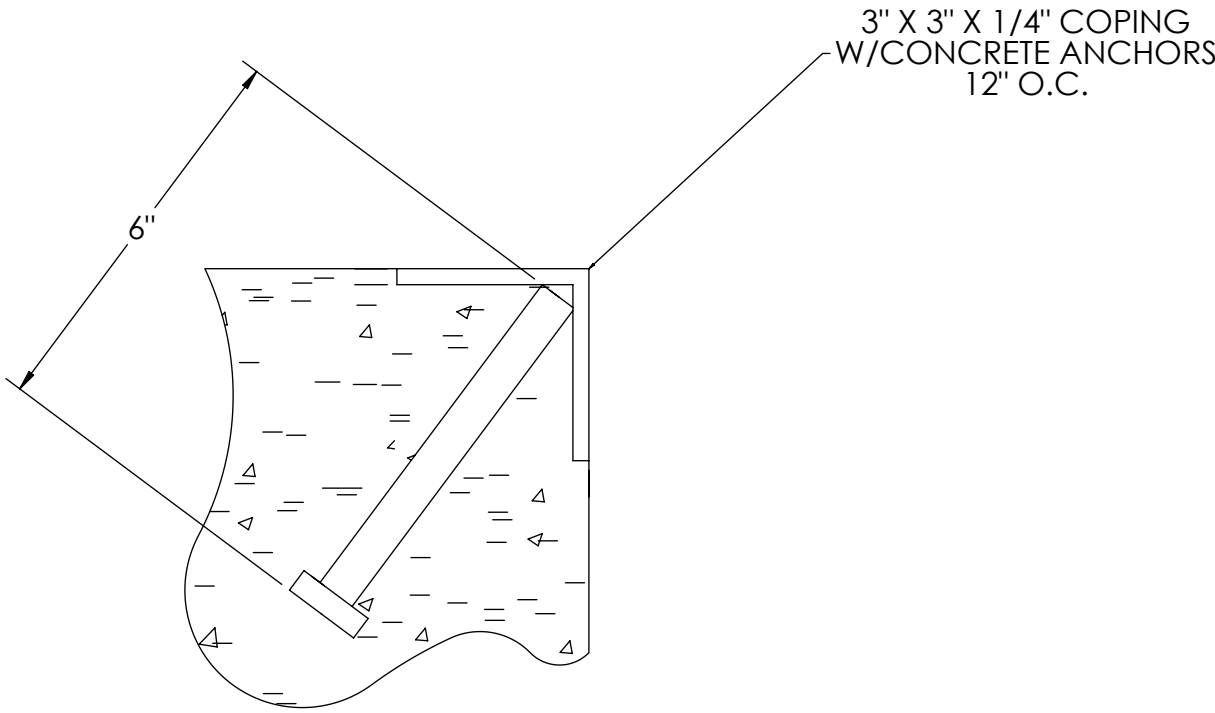

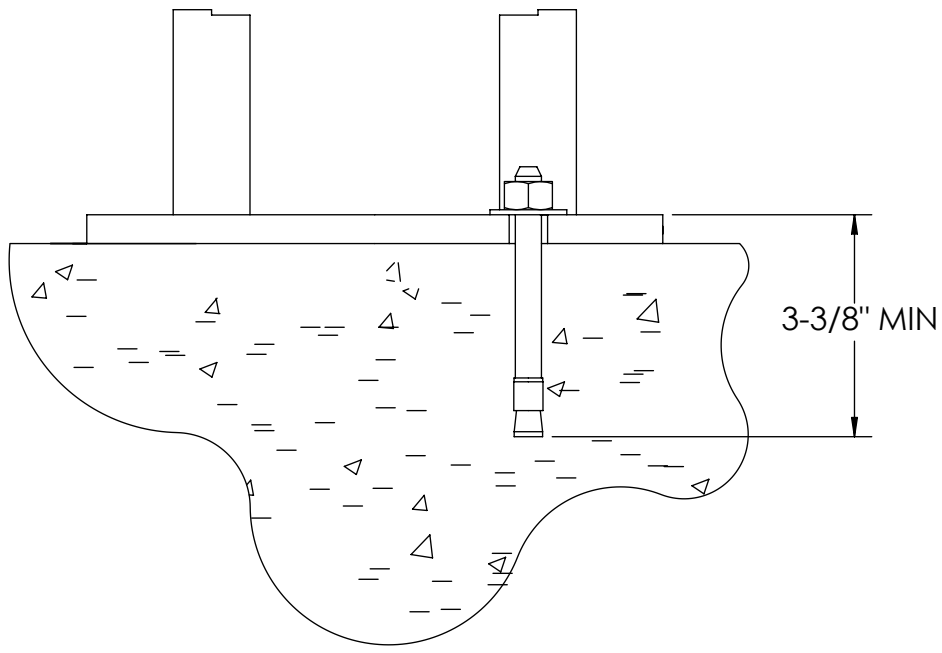

DETAIL C

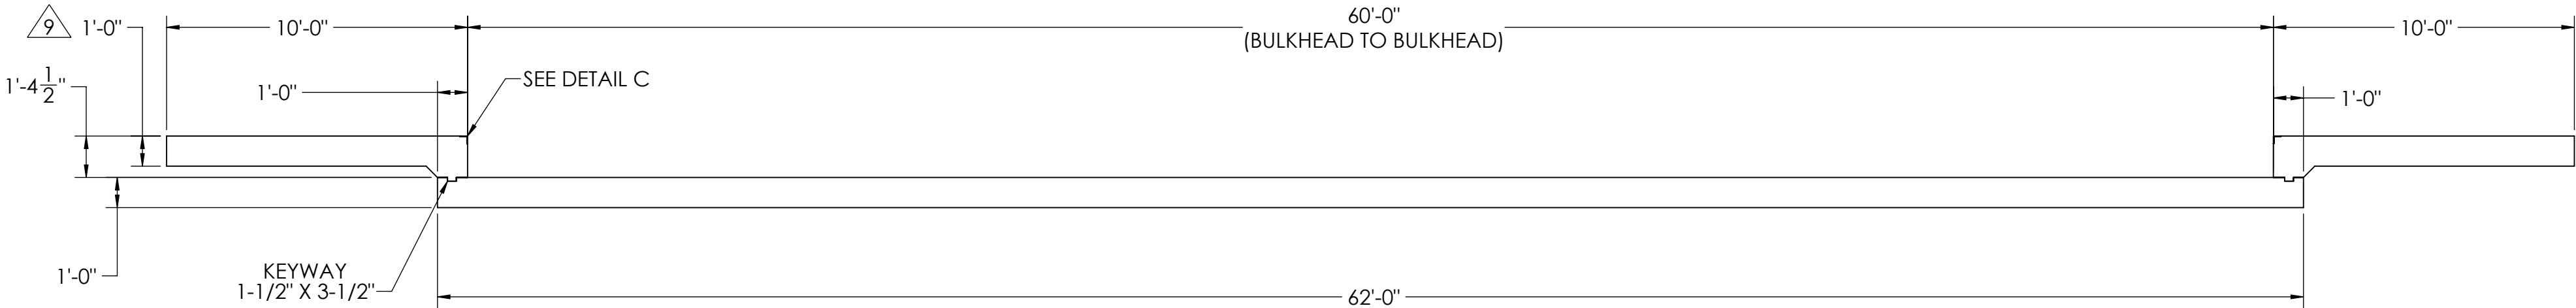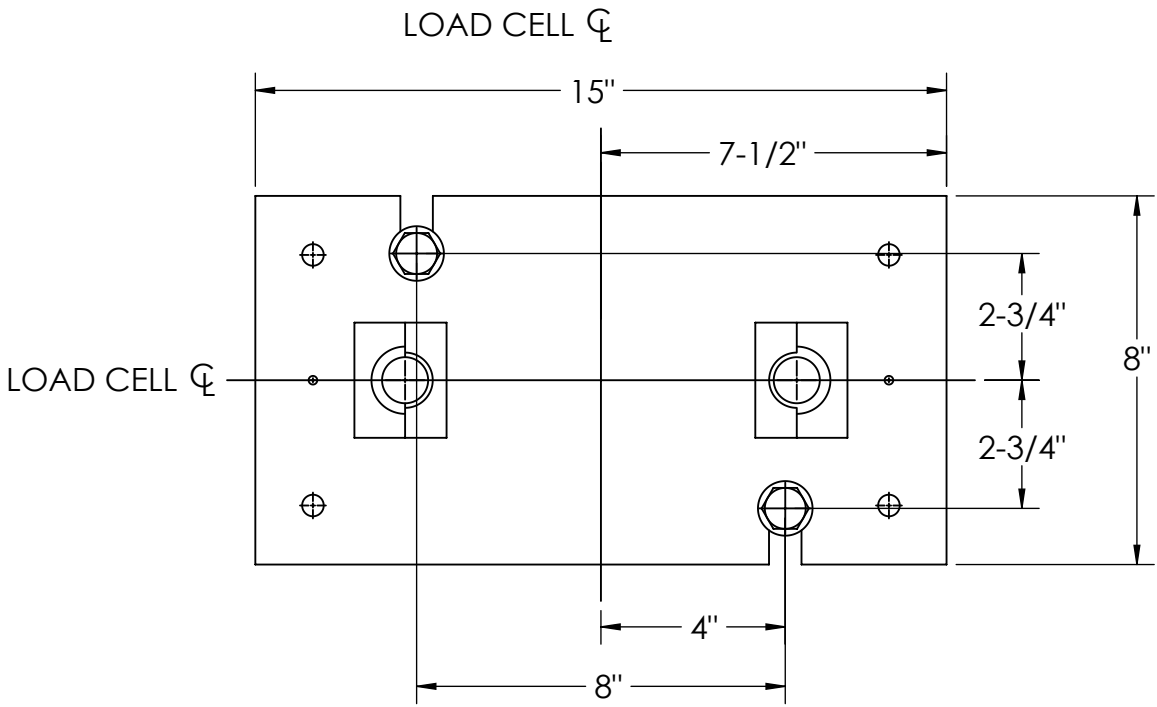

DETAIL D



DESIGNED BY DATE S. JOHNSON 02/03/2017		DRAWN BY DATE S. JOHNSON 02/03/2017		FIELD APPROVAL DATE S. JOHNSON 08/24/2017		<div><div></div><div>RICE LAKE</div><div>WEIGHING SYSTEMS</div></div>
TREATMENT NONE		THIS DRAWING AND INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC. HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMER'S ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED WITHOUT RLWS' SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.		UNLESS OTHERWISE SPECIFIED UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT		
NUMBER OF CRANES: MINIMUM CRANE CAPACITY: ESTIMATED WEIGHT (POUNDS):		<div><div></div><div>DO NOT SCALE DRAWING SURFACE FINISH ✓ ANGLE: ±</div></div>		DESCRIPTION FOUNDATION, CONCRETE SLAB 60' X 12' OTR SERIES TRUCK SCALE		
		TOLERANCES DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED XX: ± XXX: ±		SCALE 1:50	SHEET 2 OF 3	MATERIAL 180289
				THIRD ANGLE PROJECTION 	P/N	REV A1

