

REVISION								
REV.	ECO	DESCRIPTION	INIT	DATE				
Α		ENGINEERING RELEASE	SPJ	01/27/2017				

## **DETAILS**

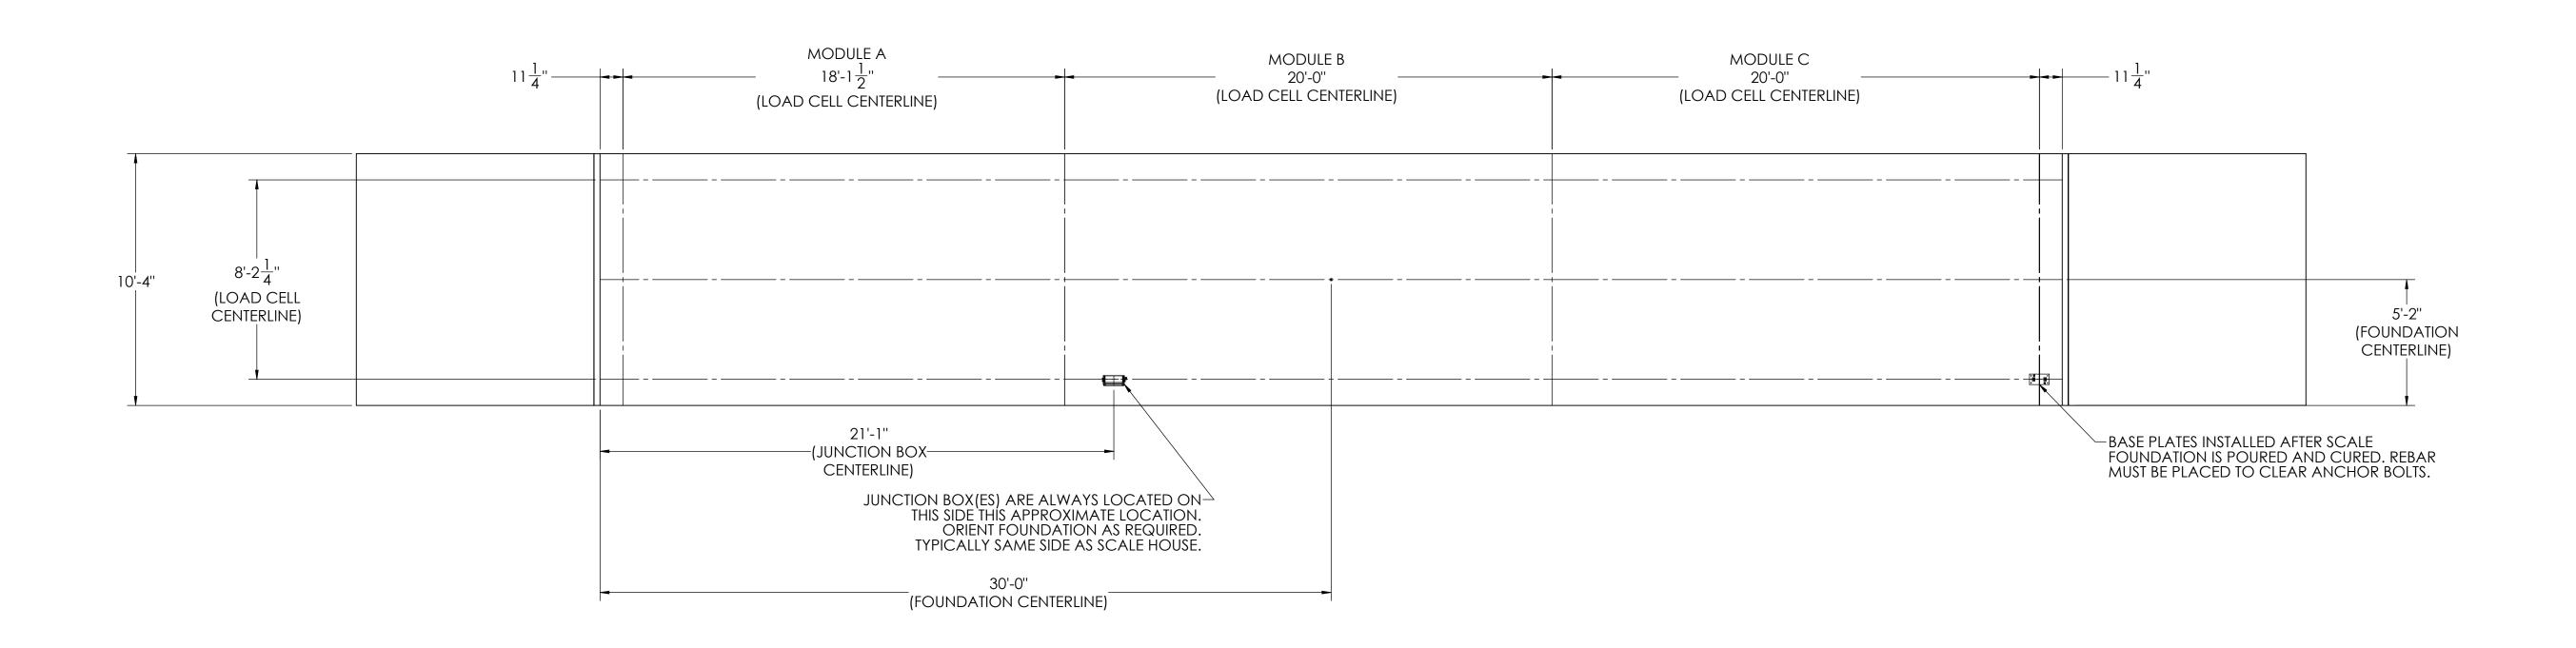

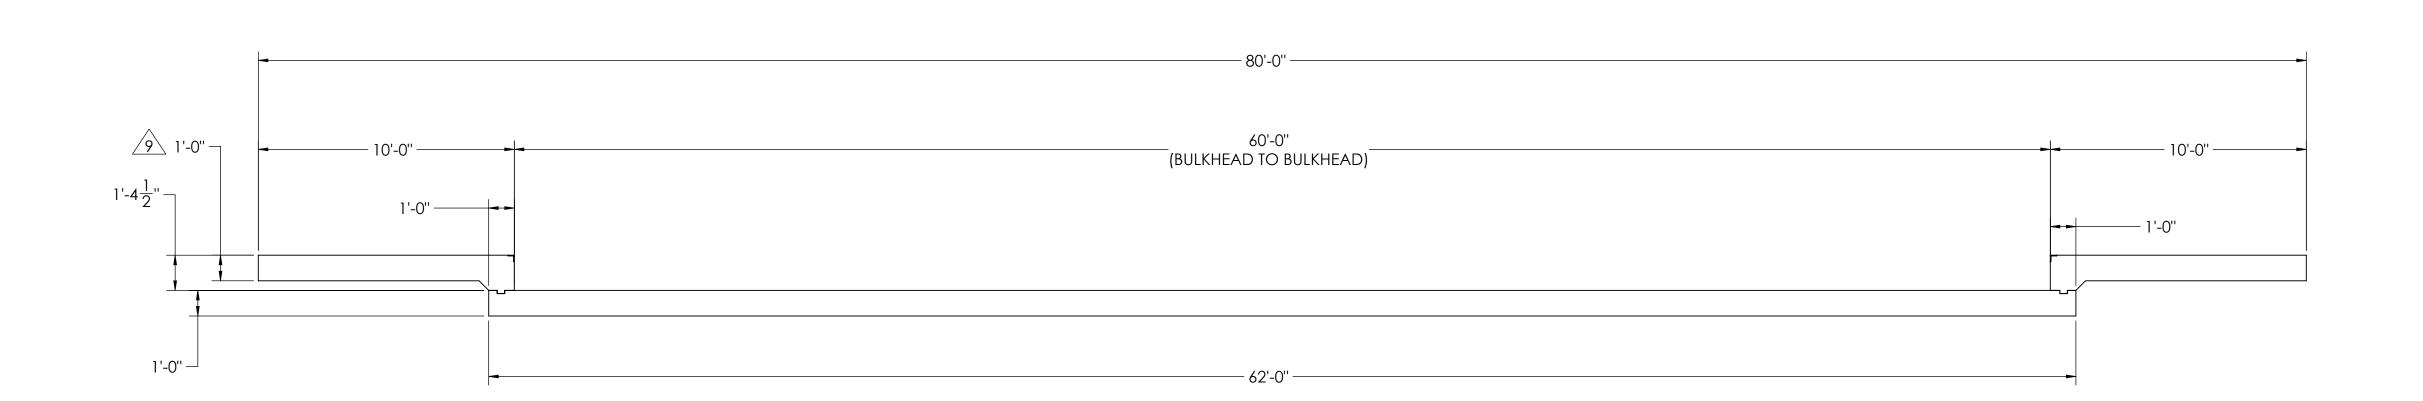

NOTES:

1) CONCRETE: f'c = 3000 PSI @ 28 DAYS.

2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60,

3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.

4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.

5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.

6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.

8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".

APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS

7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.


10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION


estimated weight (pounds)	.XXX: ± ANGLE: ±	THIRD ANGLE PROJECT	ION P/N	180404	REV A 1
MINIMUM CRANE CAPACITY:	DRAWING UNLESS OTHERWISE SPECIFIED  URFACE  XX: ±  FINISH	1:45	1 OF 3	MATERIAL	
NUMBER OF CRANES:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AN SHALL BE IMMEDIATELY RETURNED UPON REQUE TO LERANCES  O NOT SCALE DRAWING TOLERANCES			N, CONCRETE SL SERIES TRUCK SC	
NONE	THIS DRAWING AND INFORMATION CONTAINE HEREIN, IS AND REMAINS THE PROPERTY OF RIC LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIL	UNITS TO BE ALL THREADS TO ALL DIMENSION: AFTER TRE	E INCHES O BE CLASS 2 S APPLICABLE	RICE L WEIGHING	AKE' SYSTEMS
designed by / date S.JOHNSON 01/27/2017	S.JOHNSON 01/27/2017	S.JOHNS 09/28/20	ON		


CONCRETE SCHEDULE					
V		VOLUME (CUBIC YARDS)			
	APPROACHES	8.0			
·	FLOOR	23.9			
TOTAL		. 31.9			
·					
MISC. STEEL					
COPING	3 X 3 X 1/4	21 <b>LN .FT</b> 103 <b>LBS</b>			


## CONCRETE LAYOUT



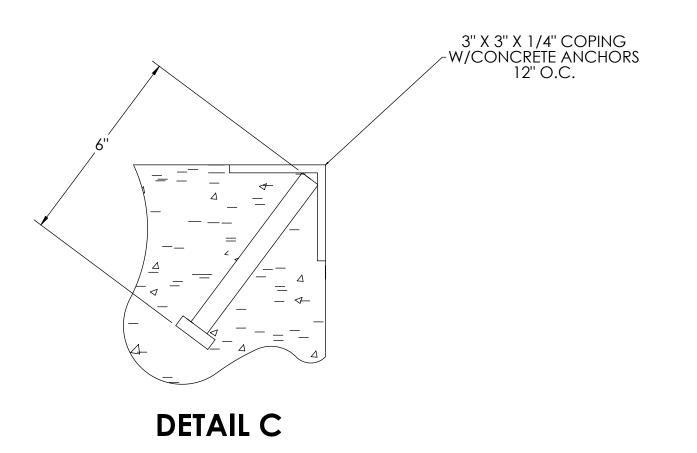


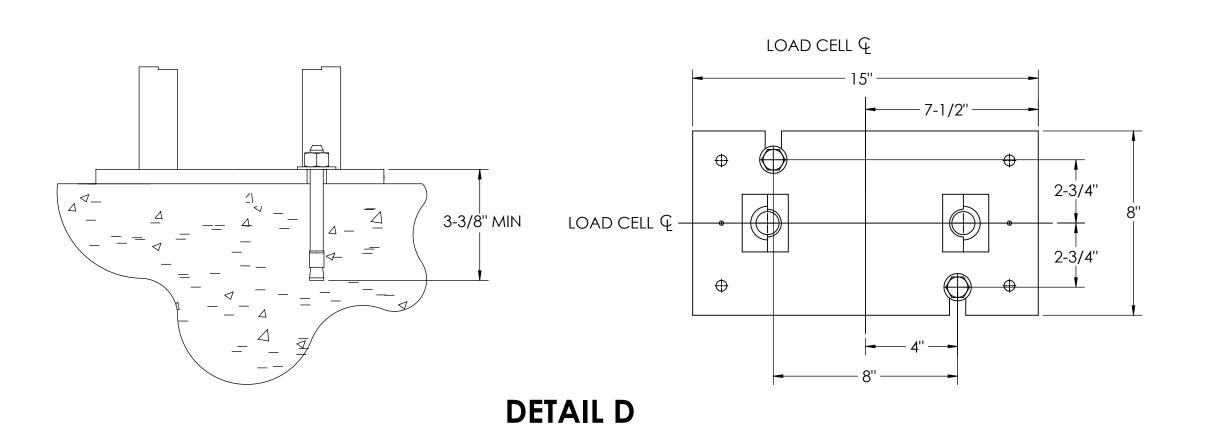

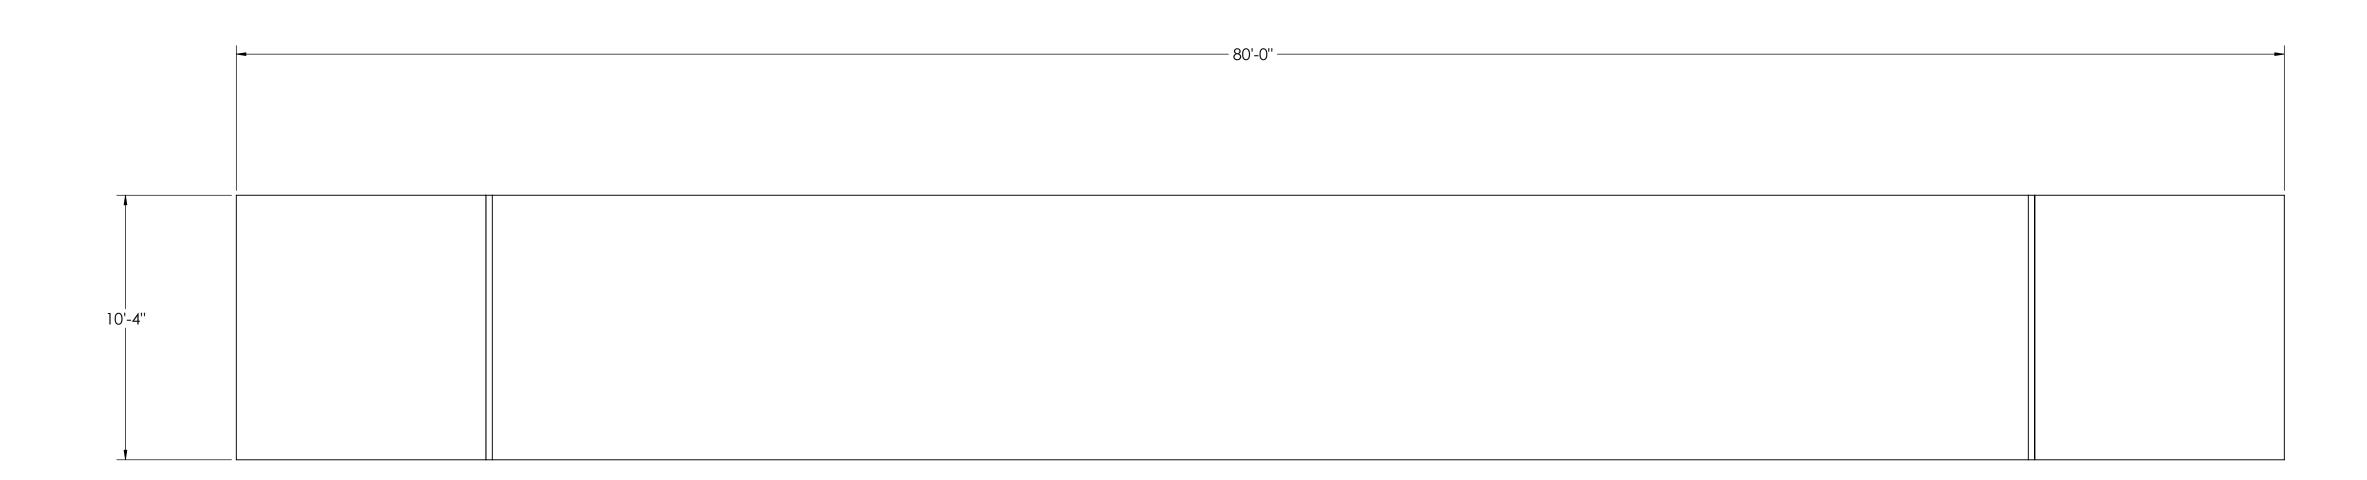

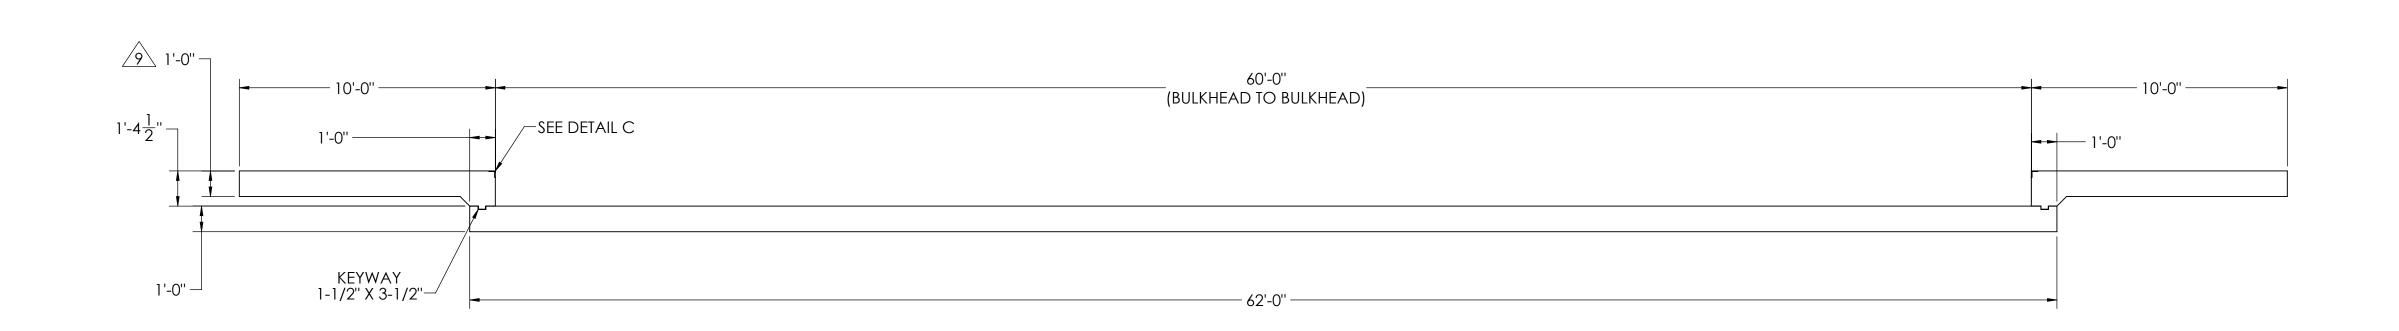

ESTIMATED WEIGHT (POUNDS)	.XXX: ±  ANGLE: ±	THIRD ANGLE PROJECTION P/N	180404 REV A1
MINIMUM CRANE CAPACITY:	DRAWING UNLESS OTHERWISE SPECIFIED SURFACE .XX: ±	1:45 SHEET 2 OF 3	3 MATERIAL
NUMBER OF CRANES:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.  TOLERANCES  DO NOT SCALE DRAWING TOLERANCES	FOUNDATIO OTR	N, CONCRETE SLAB 60' X 10 SERIES TRUCK SCALE
TREATMENT	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	RICE LAKE WEIGHING SYSTEMS
DESIGNED BY / DATE S.JOHNSON 01/27/2017	S.JOHNSON 01/27/2017	PEER APROVAL/ DATE S.JOHNSON 09/28/2017	

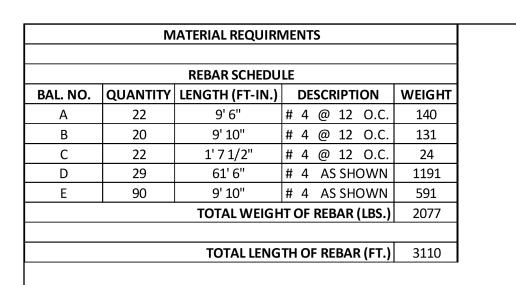

## REBAR LAYOUT

