

	REVISION						
RE	٧.	ECO	DESCRIPTION	INIT	DATE		
A	١		ENGINEERING RELEASE	SPJ	05/26/2017		

## **DETAILS**

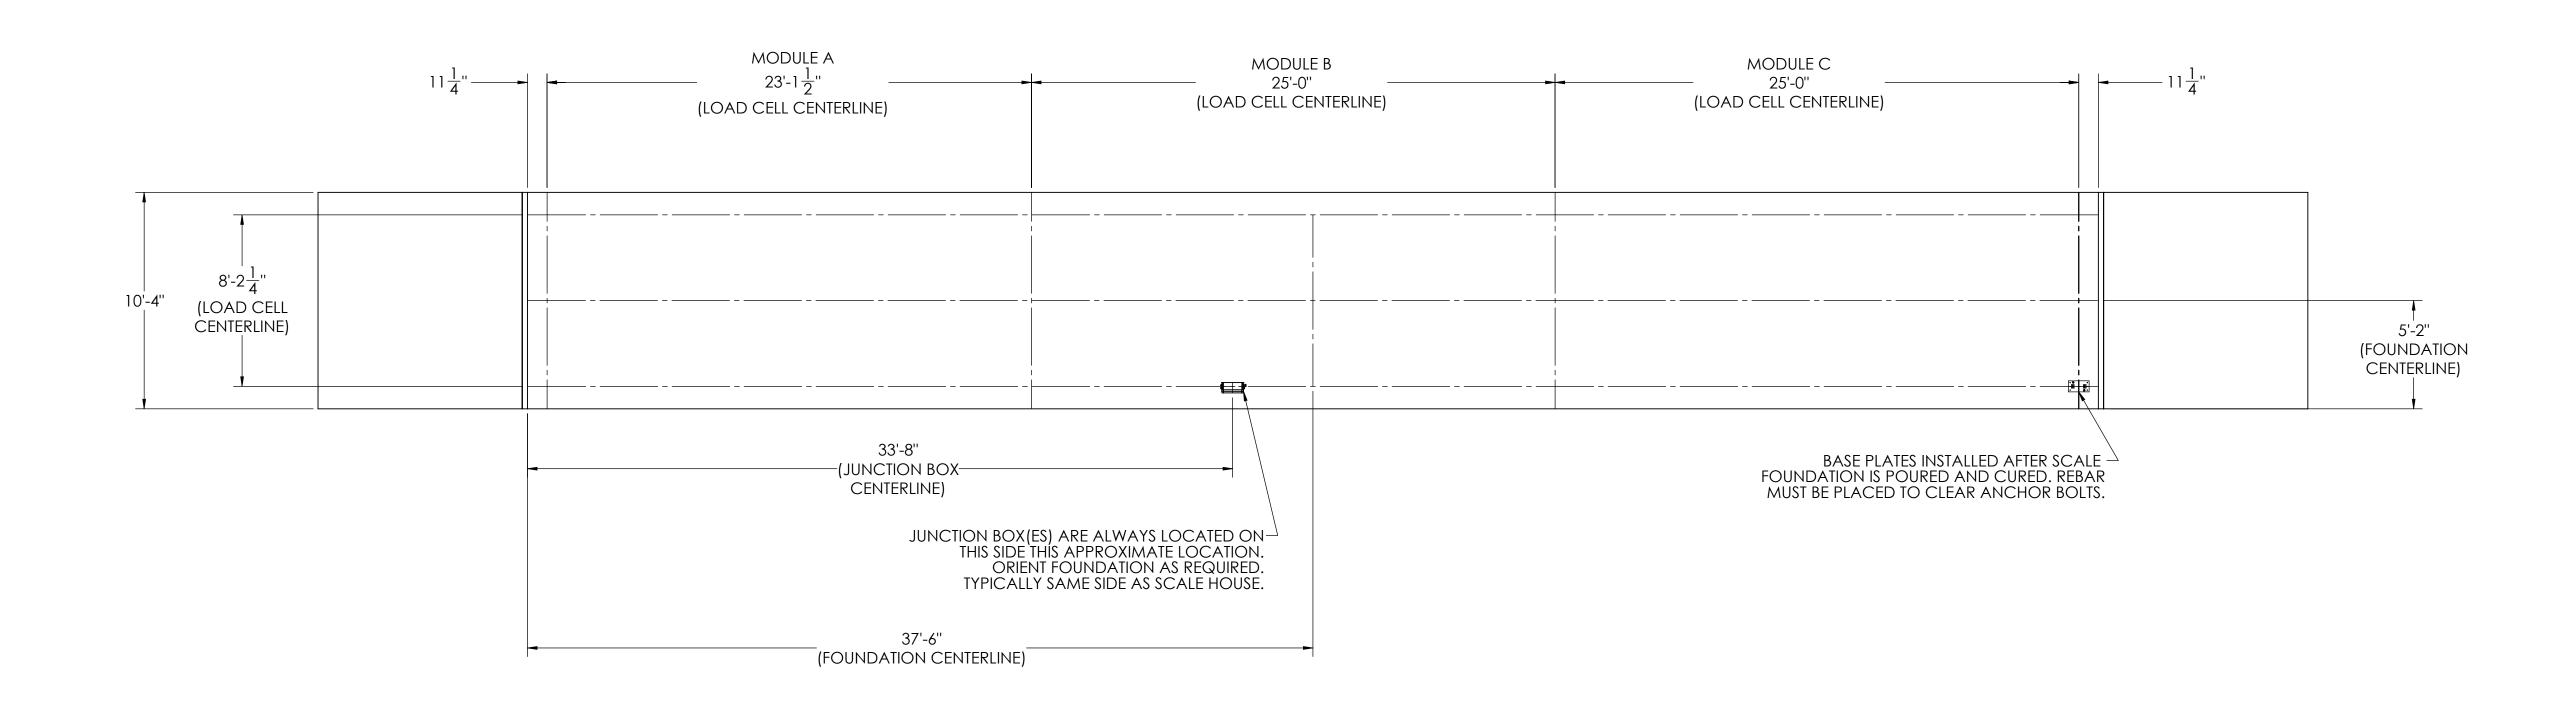

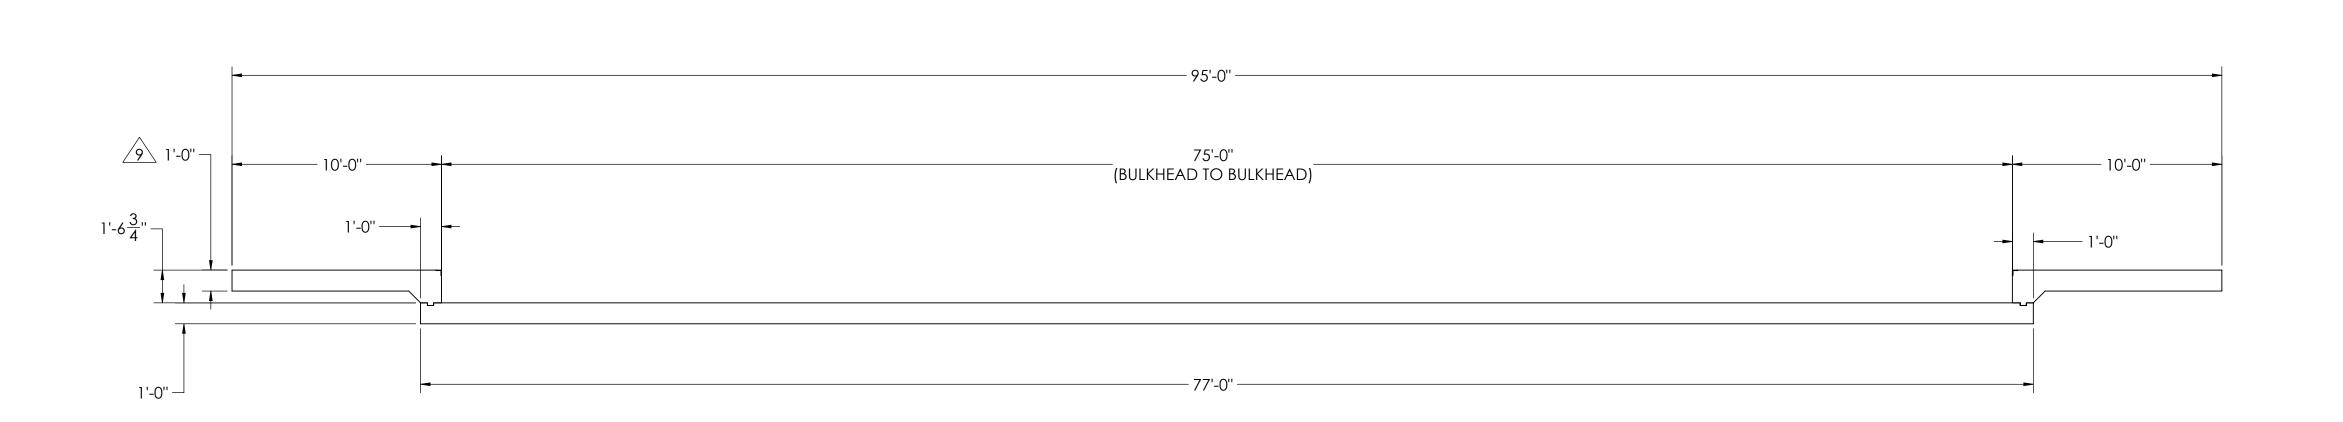

NOTES:

1) CONCRETE: f'c = 3000 PSI @ 28 DAYS.

2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60,

3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.

4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.

5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.

6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.

OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.

7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.

8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".


APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS


10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION


DESIGNED BY / DATE S.JOHNSON 05/26/2017	DRAWN BY / DATE S.JOHNSON 05/26/2017	peer aproval/ date S.JOHNSON 09/28/2017	
NONE	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	RICE LAKE' WEIGHING SYSTEMS
NUMBER OF CRANES:	without rlws specific written consent and shall be immediately returned upon request.  TOLERANCES  DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED  SURFACE INISH  XXX: ±  XXX: ±  ANGLE: ±	: FOUNDAIR	ON, CONCRETE SLAB 75' X 10 R SERIES TRUCK SCALE
MINIMUM CRANE CAPACITY:		SCALE 1:55 SHEET 1 OF	3 MATERIAL
ESTIMATED WEIGHT (POUNDS)		THIRD ANGLE PROJECTION P/N	180417 REV A


CONCRETE SCHEDULE					
		VOLUME	(CUBIC YARDS)		
	APPROACHE	S	8.3		
	FLOO	R	29.7		
	TOTA	L	37.9		
MISC. STEEL					
PIT COPING	3 X 3 X 1/4	21 <b>LN .FT</b>	103 <b>LBS</b>		

## CONCRETE LAYOUT

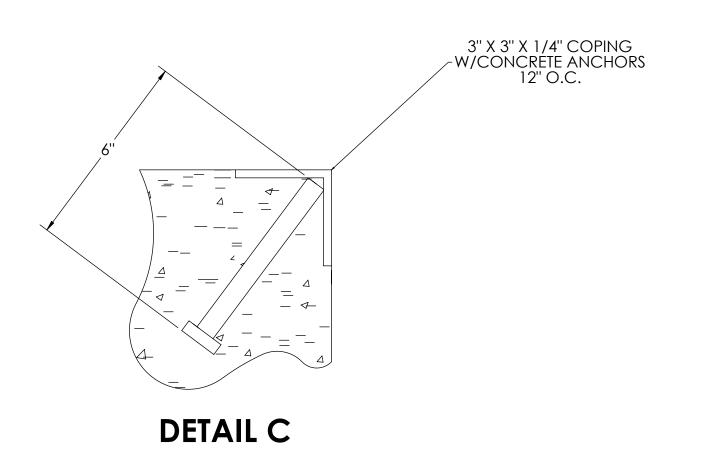

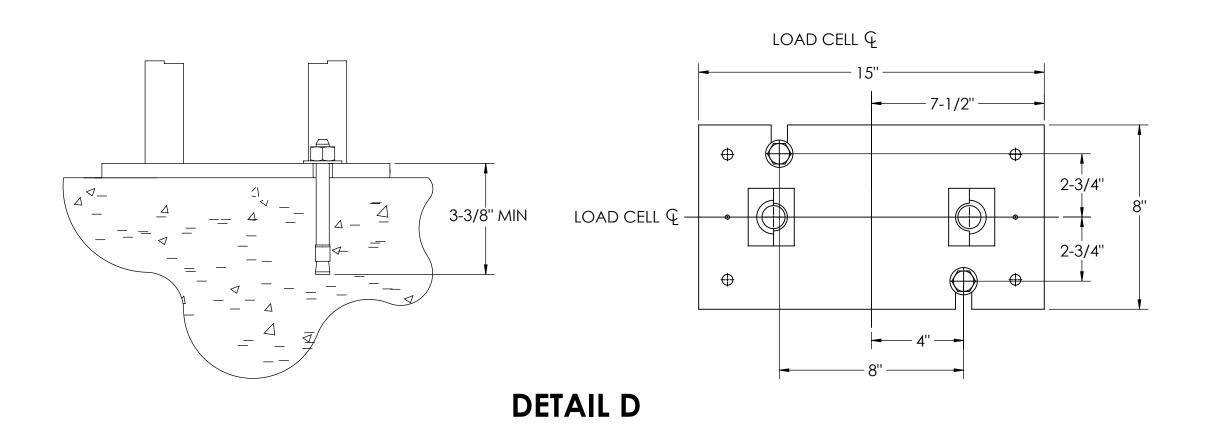

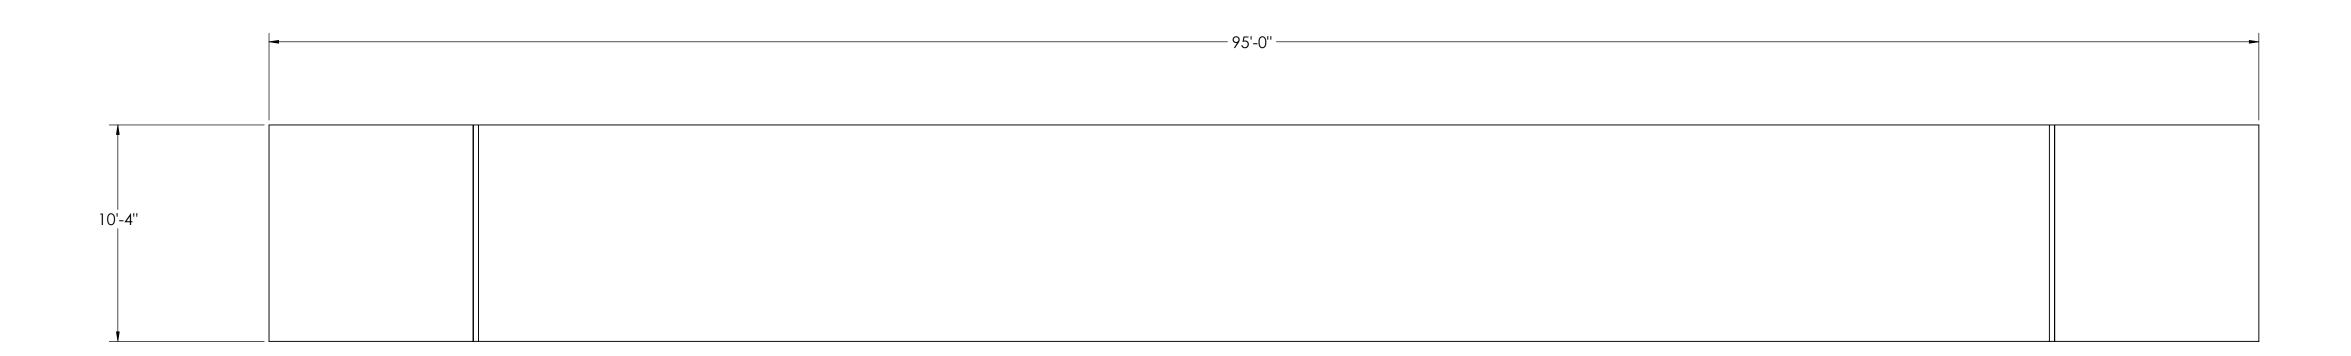

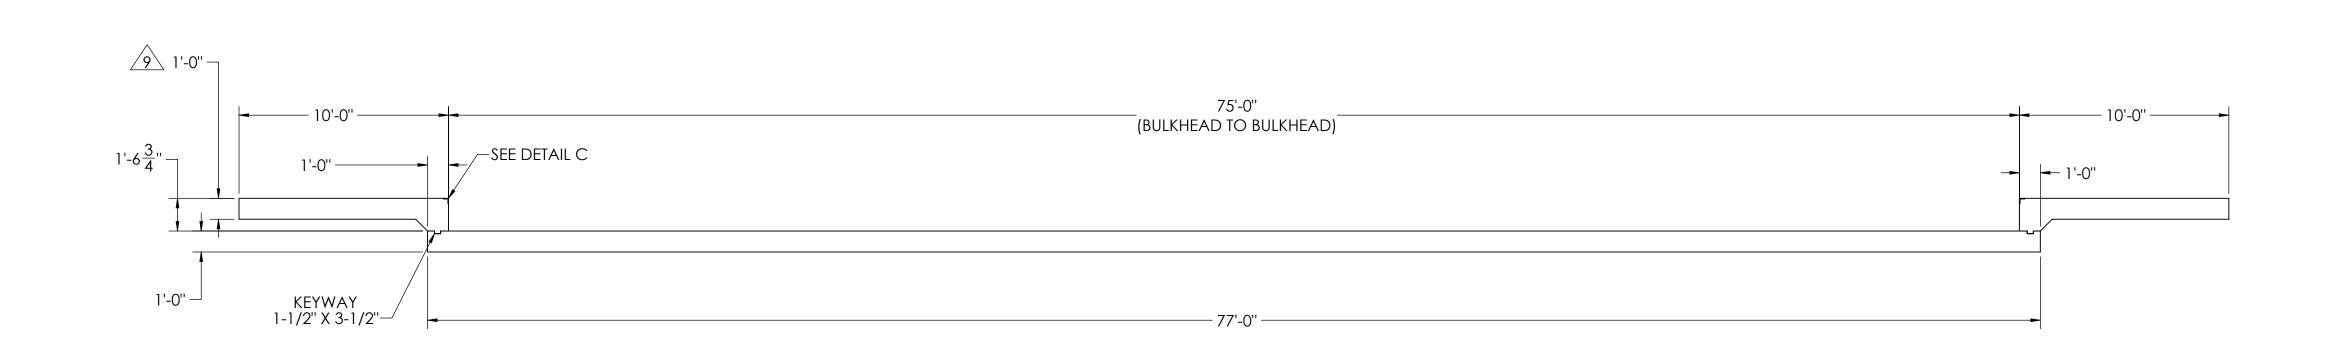

ESTIMATED WEIGHT (POUNDS)	.XXX: ±  ANGLE: ±	THIRD ANGLE PROJECTION P/N	180417 REV A
MINIMUM CRANE CAPACITY:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.  TOLERANCES  DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED  SURFACE FINISH  WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SP	1:55 SHEET 2 OF	3 MATERIAL
NUMBER OF CRANES:		FOUNDATIC OTR	ON, CONCRETE SLAB 75' X 10' SERIES TRUCK SCALE
NONE	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	WEIGHING SYSTEMS
S.JOHNSON 05/26/2017	S.JOHNSON 05/26/2017	S.JOHNSON 09/28/2017	
DESIGNED BY / DATE	DRAWN BY / DATE	PEER APROVAL/ DATE	

## 

## REBAR LAYOUT

