

REVISION									
REV.	ECO	DESCRIPTION	INIT	DATE					
A		ENGINEERING RELEASE	SPJ	02/17/2017					

DETAILS

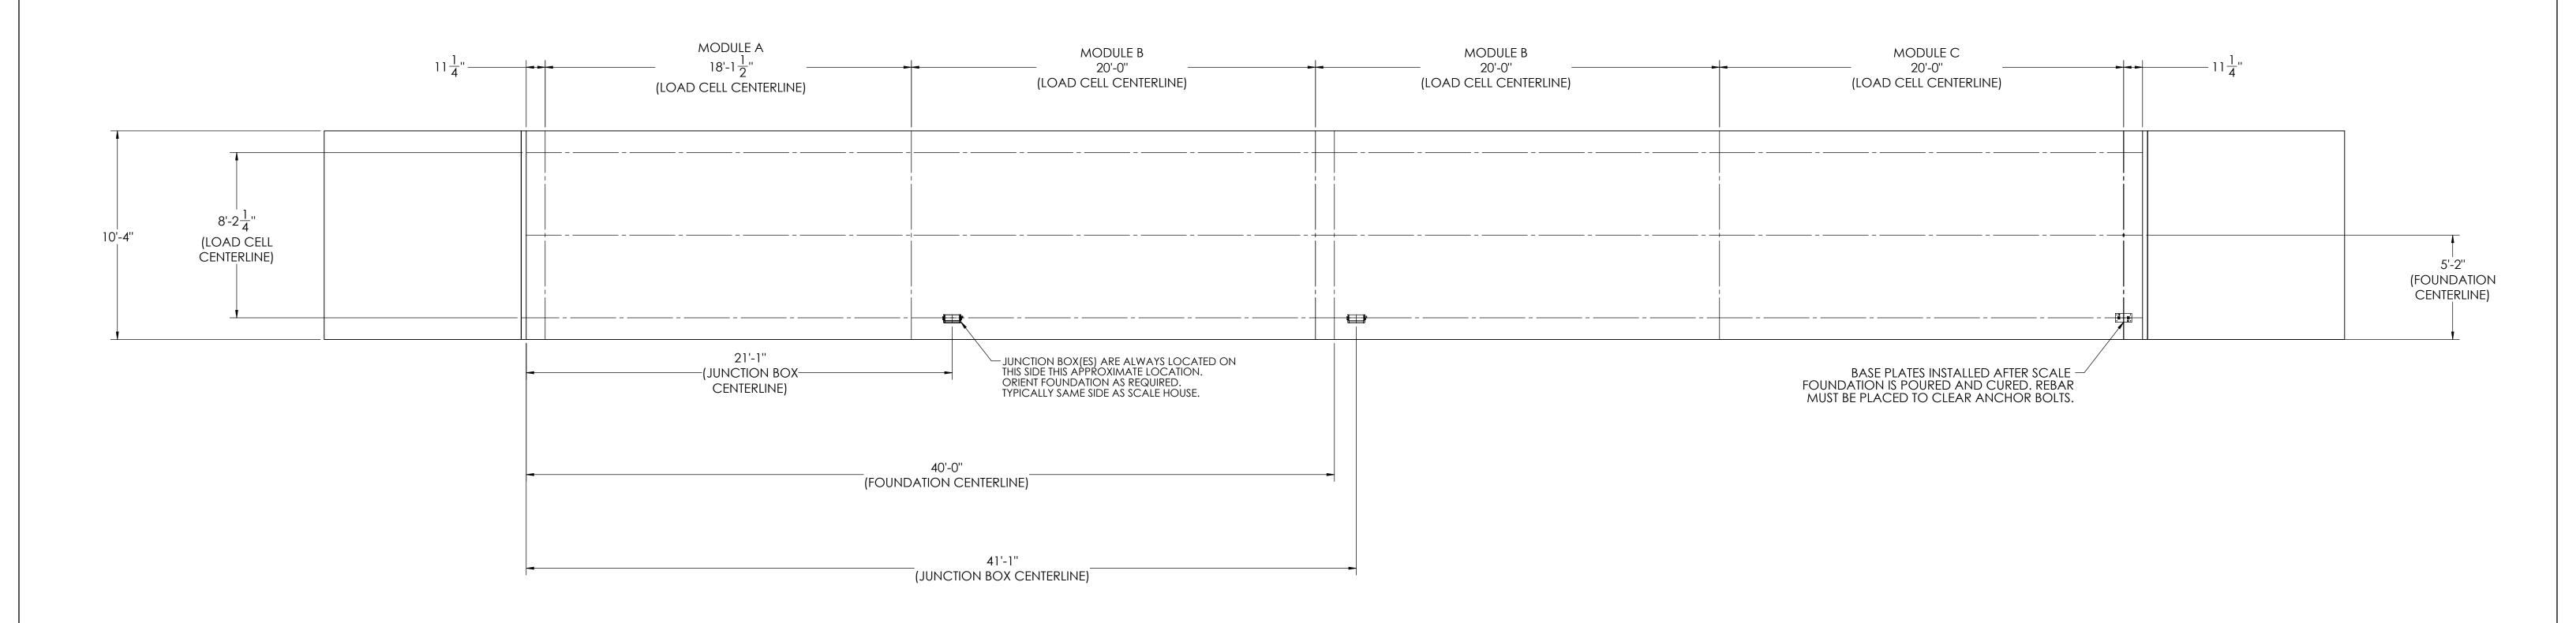

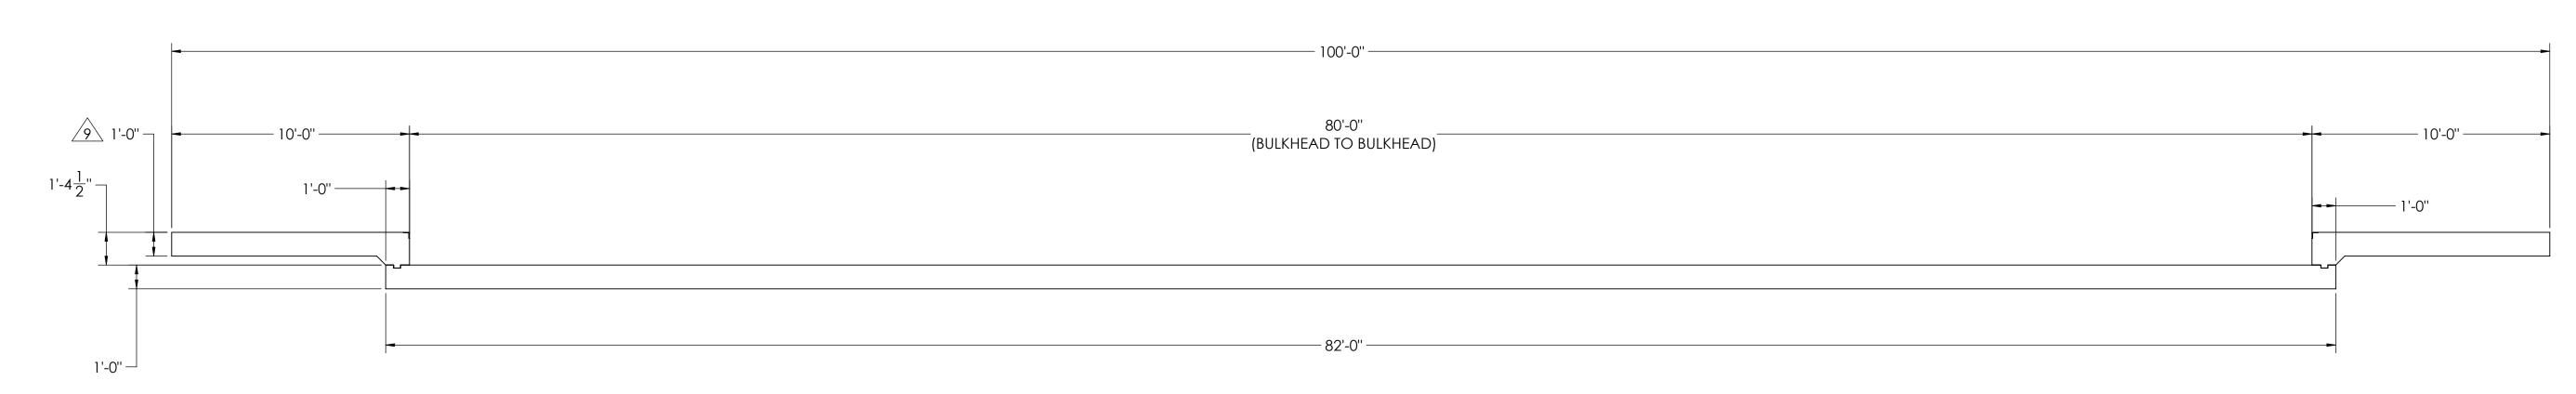

NOTES:

- 1) CONCRETE: f'c = 3000 PSI @ 28 DAYS.
- 2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60,
- 3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.
- 4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.
- 5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.
- 6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE
- OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.
- 7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.
- 8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".
- 9 APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS
- 10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION


ESTIMATED WEIGHT (POUNDS)	.XXX: ± \/ ANGLE: ±	THIRD ANGLE PROJECTION	P/N	180422	REV A1
MINIMUM CRANE CAPACITY: DI	RFACE .XX: ±	SCALE SHEET 1:45	1 OF 3	MATERIAL	
NUMBER OF CRANES:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST. TOLERANCES OT SCALE DRAWING TOLERANCES			, CONCRETE SLA ERIES TRUCK SCA	
TREATMENT	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	AFTER TREATMEN	HES CLASS 2 LICABLE	RICE L. WEIGHING	
designed by / date S.JOHNSON 02/17/2017	S.JOHNSON 02/17/2017	S.JOHNSON 09/28/2017			

REVISION CONCRETE SCHEDULE REV ECO DESCRIPTION VOLUME (CUBIC YARDS) CONCRETE LAYOUT APPROACHES 8.0 FLOOR 31.6 TOTAL 39.6 MISC. STEEL 21 LN .FT 103 LBS PIT COPING 3 X 3 X 1/4 3" X 3" X 1/4" COPING -W/CONCRETE ANCHORS 12" O.C. LOAD CELL Q 7-1/2" 3-3/8" MIN LOAD CELL Q **DETAIL C DETAIL D** - 100'-0'' -____80'-0'' ____(BULKHEAD TO BULKHEAD) _SEE DETAIL C 1'-0"

KEYWAY 1-1/2" X 3-1/2"—

estimated weight (pounds)	.XXX: ±	THIRD ANGLE PROJECTION P/N	180422 REV A 1		
MINIMUM CRANE CAPACITY: D	RAWING UNLESS OTHERWISE SPECIFIED	1:45 SHEET 2 OF			
NUMBER OF CRANES:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST. TOLERANCES OT SCALE DRAWING TOLERANCES	FOUNDATION, CONCRETE SLAB 80' X 1 OTR SERIES TRUCK SCALE			
NONE	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	WELCHING SYSTEM		
designed by / date S.JOHNSON 02/17/2017	S.JOHNSON 02/17/2017	s.johnson 09/28/2017			

INIT DATE

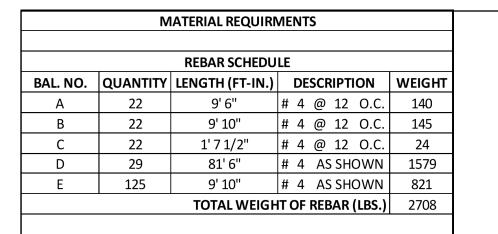

TOTAL LENGTH OF REBAR (FT.) 4054

REBAR LAYOUT

