

REVISION								
REV.	ECO	DESCRIPTION	INIT	DATE				
A		ENGINEERING RELEASE	SPJ	03/02/2017				

## **DETAILS**

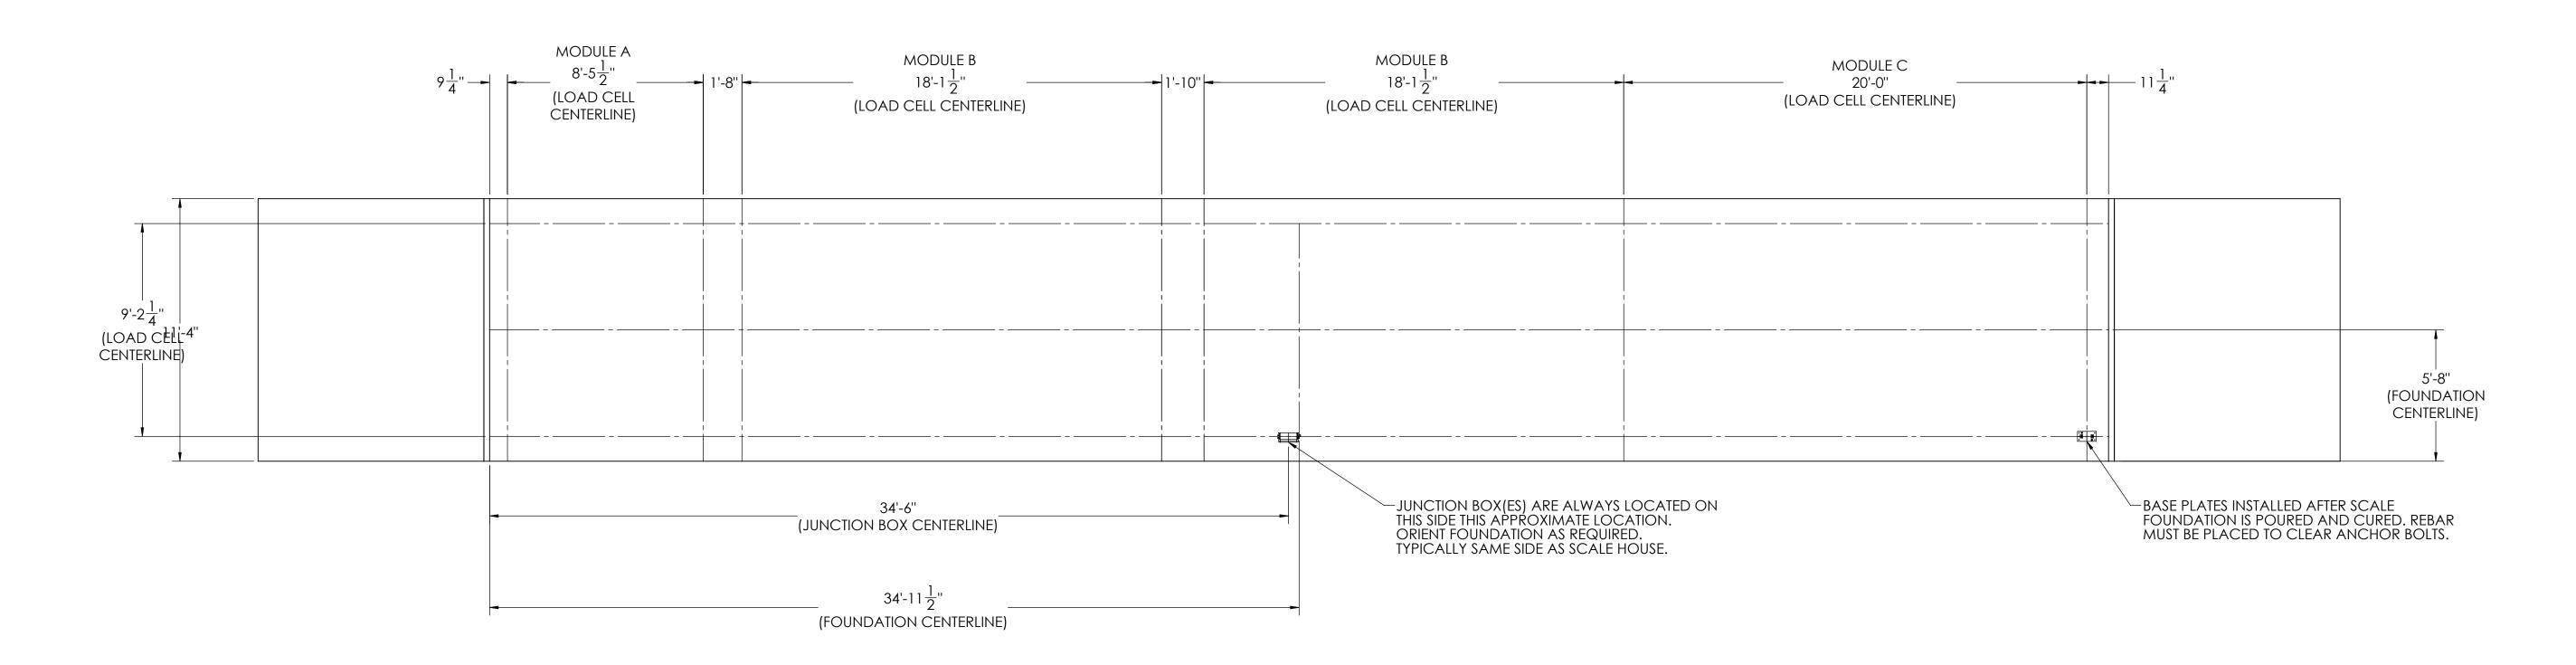

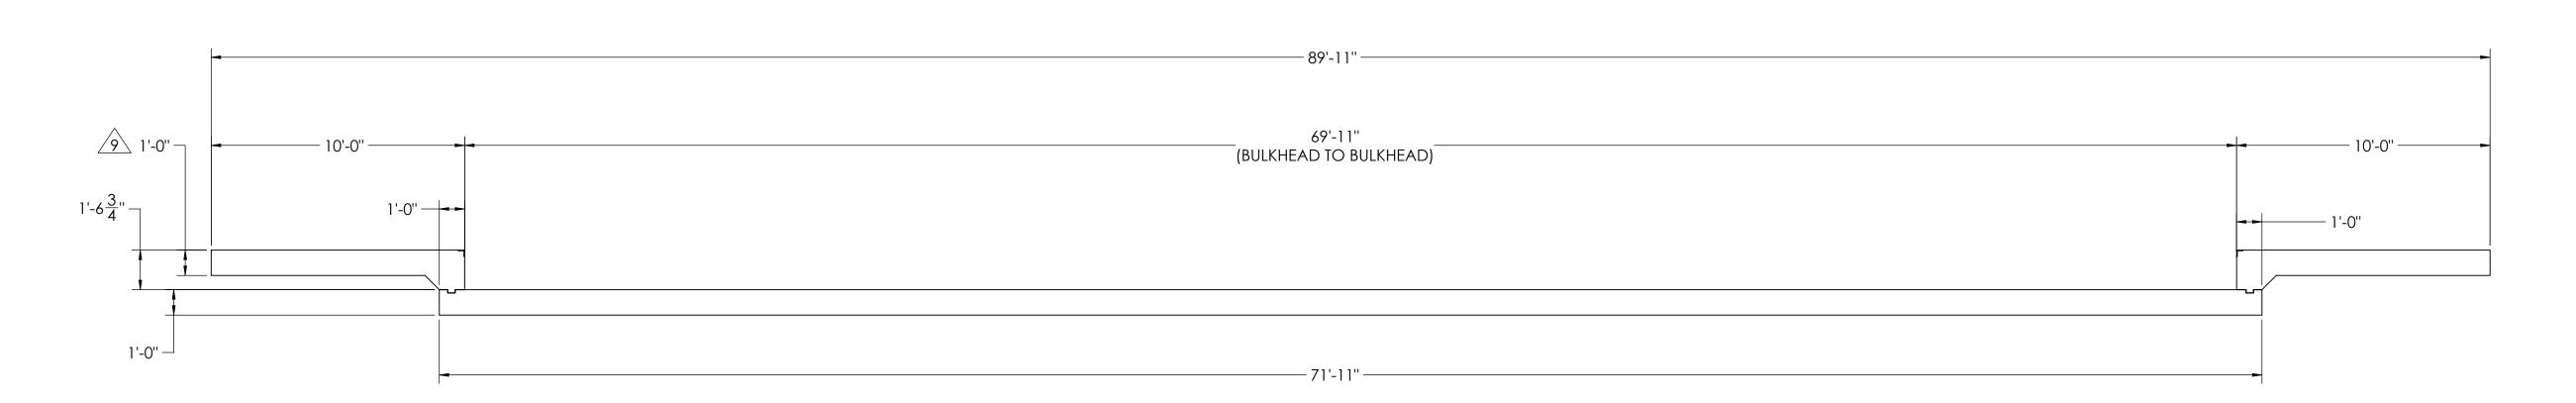

#### NOTES:

- 1) CONCRETE: f'c = 3000 PSI @ 28 DAYS.
- 2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60,
- 3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.
- 4) MONOLITHIC POUR OF SLAB AND APPROACHES IS ALLOWED, AT CONTRACTOR'S DISCRETION.
- 5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.

8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".


- 6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 1500 PSF, IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.
- 7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.
- 9 APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS
- 10) IF FROST CAN PENETRATE BELOW FOUNDATION, AT LEAST 12 INCHES OF WELL DRAINED, COMPACTED BASE MATERIAL MUST BE PROVIDED UNDER FOUNDATION


estimated weight (pounds)	.XXX: ±  ANGLE: ±	THIRD ANGLE PROJECTION P/N	182102	REV A
MINIMUM CRANE CAPACITY:	DRAWING UNLESS OTHERWISE SPECIFIED  SURFACE  EINIGH  EINIGH	1:45 SHEET 1 OF	3 MATERIAL	_
NUMBER OF CRANES:	TOLERANCES  NOT SCALE DRAWING TOLERANCES		n, concrete slab 1 Series multi-axle sc	
TREATMENT	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND	AFTER TREATMENT  DESCRIPTION	WEIGHING SY	STEMS
S.JOHNSON 03/02/2017	S.JOHNSON 03/02/2017	S.JOHNSON 09/28/2017		
DESIGNED BY / DATE	DRAWN BY / DATE	PEER APROVAL/ DATE		


# CONCRETE SCHEDULE VOLUME (CUBIC YARDS) APPROACHES 9.1 FLOOR 30.4 TOTAL 39.5 MISC. STEEL PIT COPING 3 X 3 X 1/4 23 LN .FT 113 LBS


### CONCRETE LAYOUT



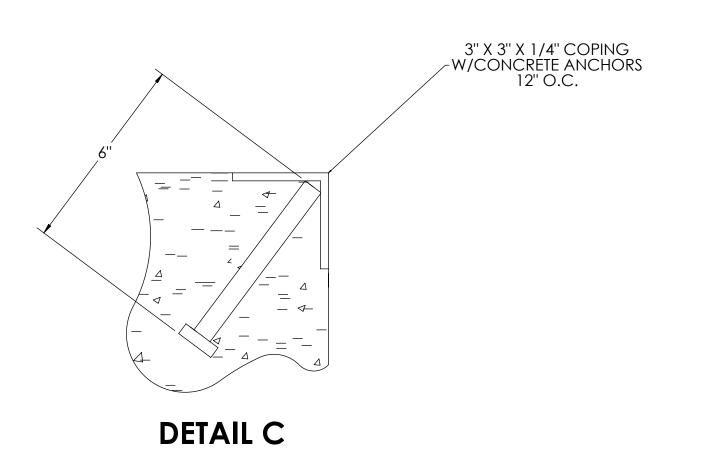


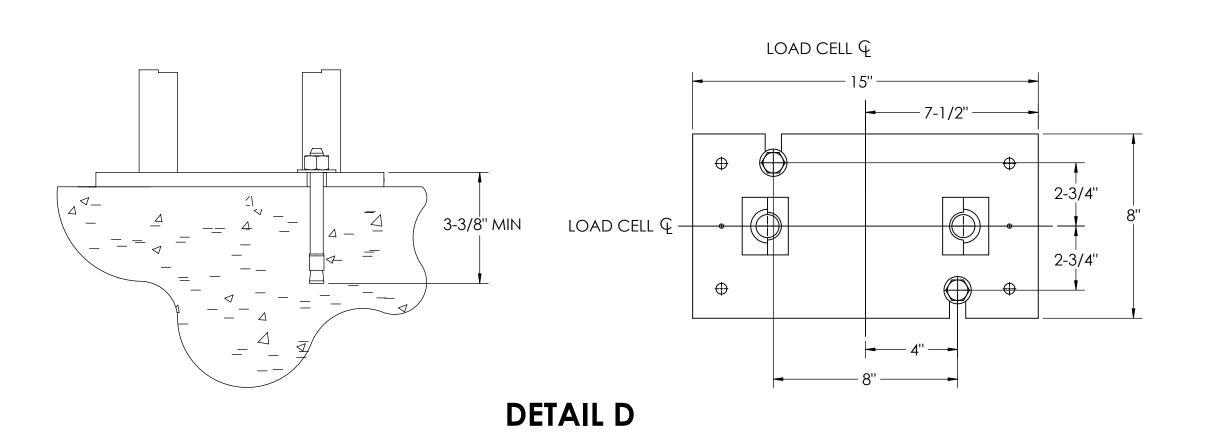

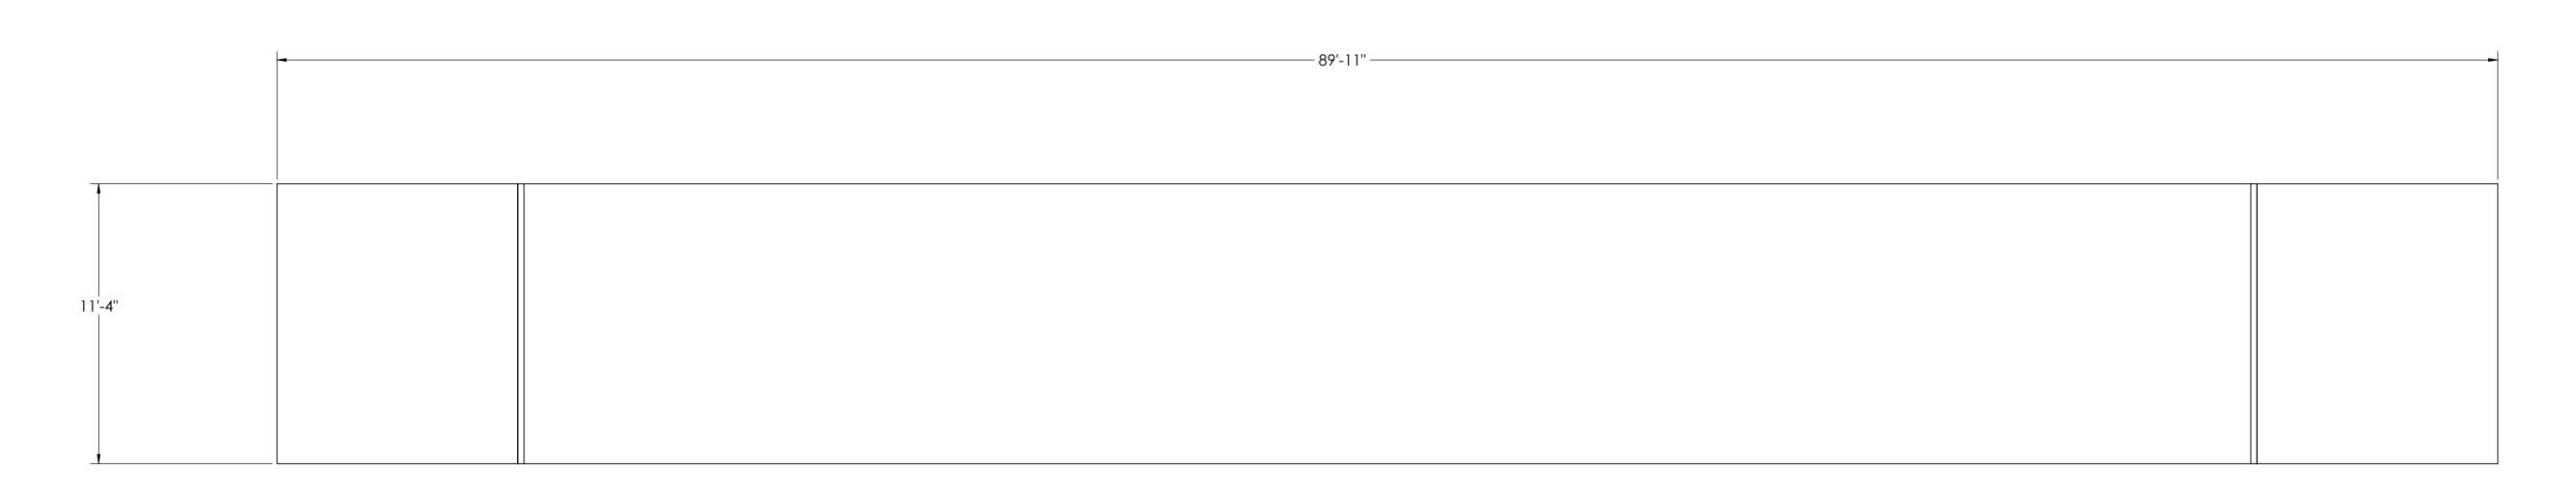

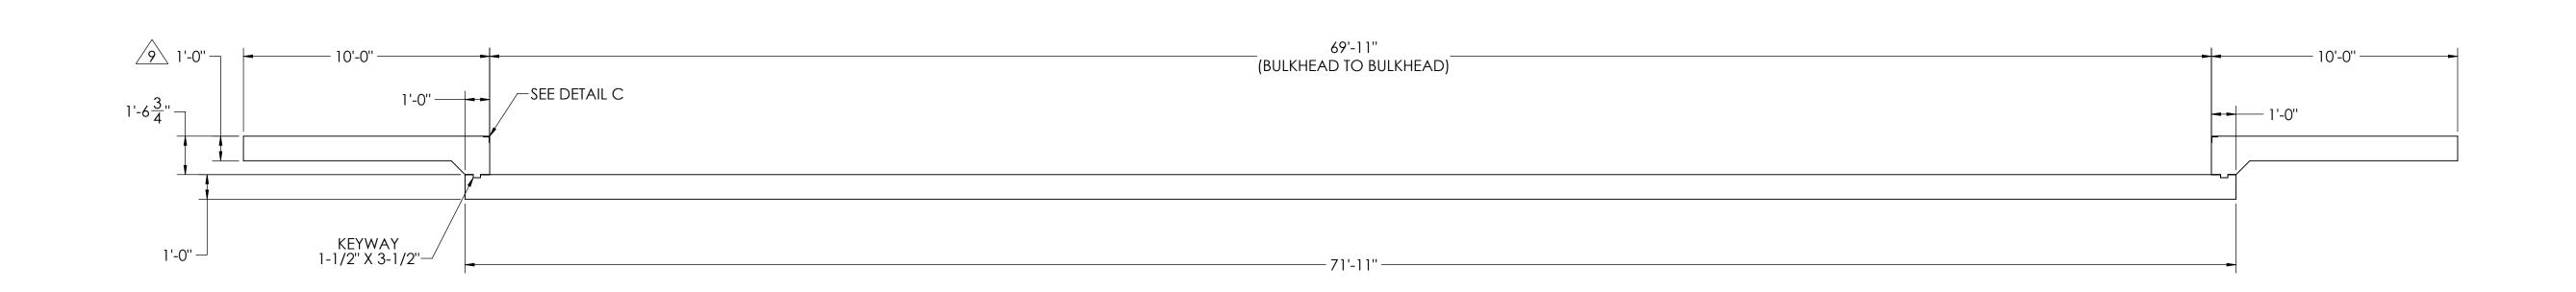

estimated weight (pounds)	.XXX: ±  ANGLE: ±	THIRD ANGLE PROJECTION P/N	182102 REV A
MINIMUM CRANE CAPACITY:	WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.  TOLERANCES  DO NOT SCALE DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED  SURFACE XX: ± FINISH	1:45 SHEET 2 OF 3	3 MATERIAL
NUMBER OF CRANES:		FOUNDATION	I, CONCRETE SLAB 10-20-40 ERIES MULTI-AXLE SCLAE
TREATMENT	THIS DRAWING AND INFORMATION CONTAINED HEREIN, IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC., HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMERS' ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED	UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT	RICE LAKE WEIGHING SYSTEMS
S.JOHNSON 03/02/2017	S.JOHNSON 03/02/2017	peer aproval/ date S.JOHNSON 09/28/2017	

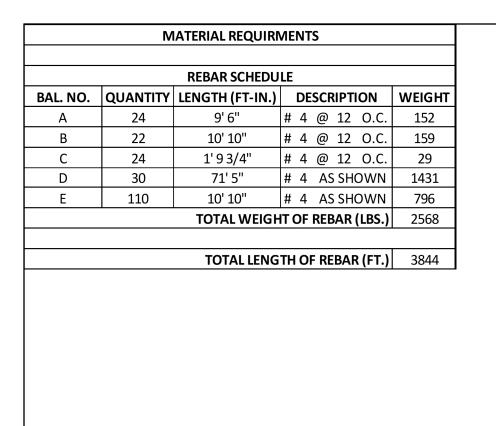

### REBAR LAYOUT

