
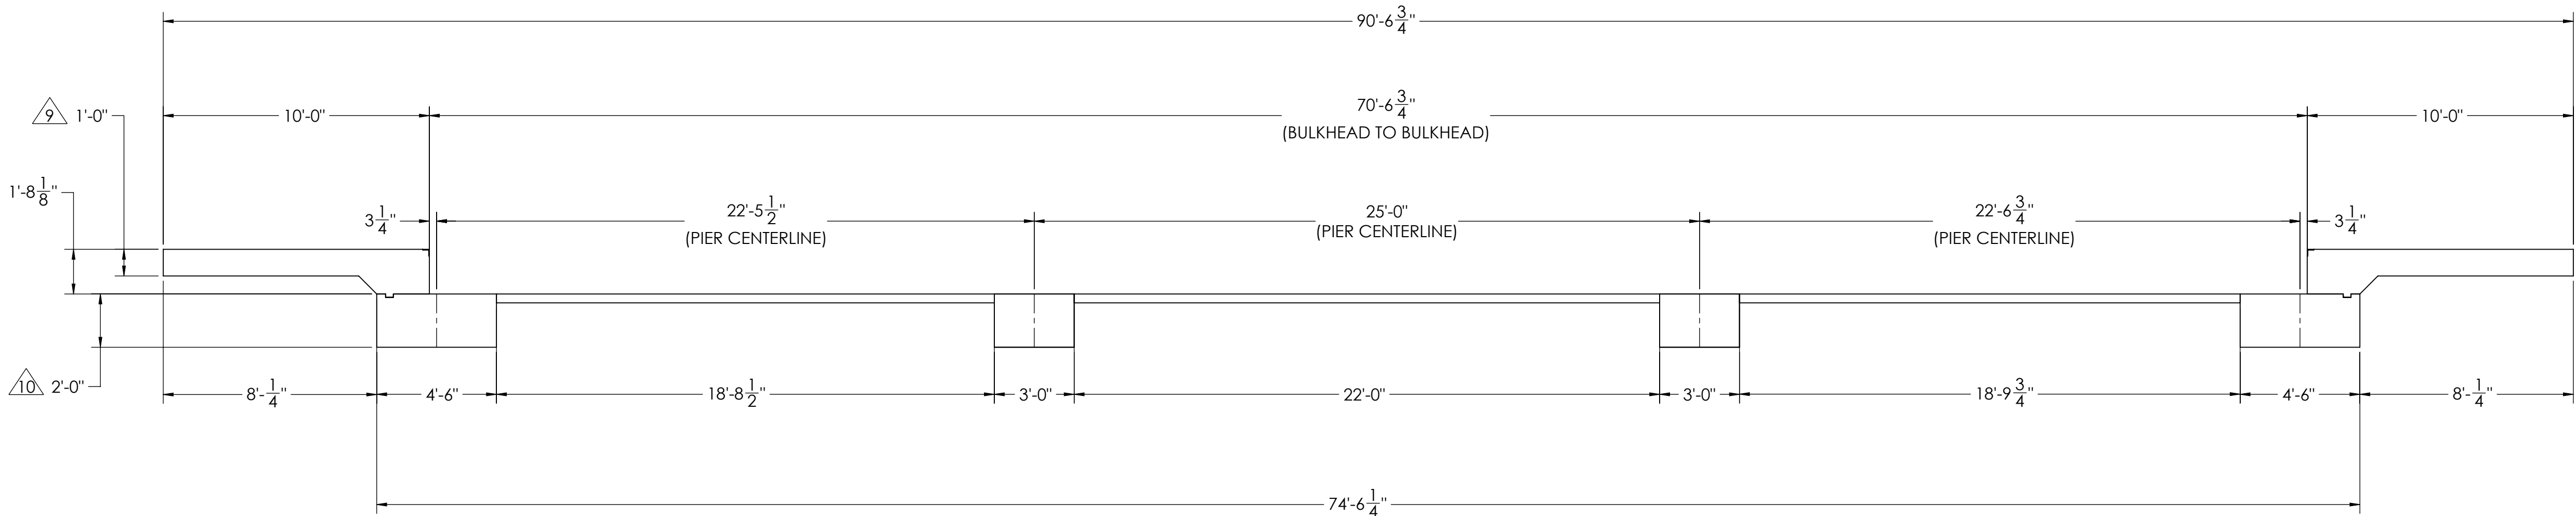


DETAILS

REVISION		INIT	DATE
REV.	ECO		
A		SPJ	03/03/2017

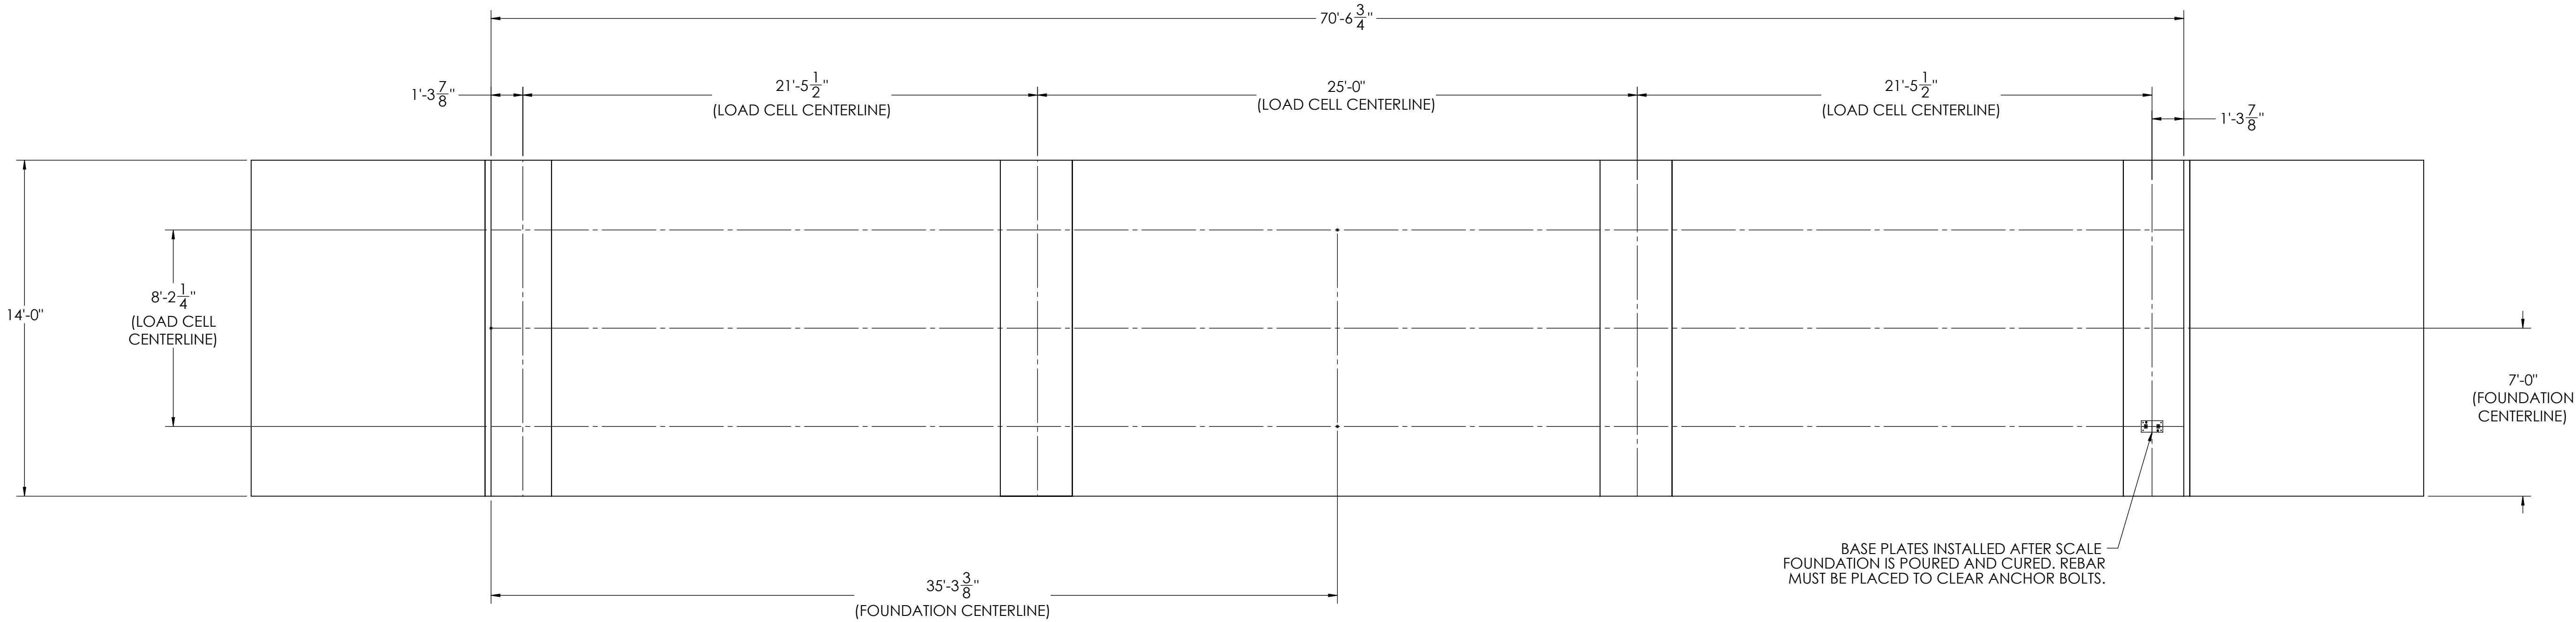


NOTES:

- 1) CONCRETE: f_c = 3000 PSI @ 28 DAYS.
- 2) REINFORCING STEEL: DEFORMED BARS ASTM A615 GRADE 60.
- 3) STATE AND LOCAL AGENCIES MAY HAVE VARIOUS REQUIREMENTS FOR APPROACH RAMP LENGTH, PITCH, AND FOR CLEAN OUT HEIGHT. PLEASE CHECK WITH ALL AGENCIES PRIOR TO CONSTRUCTION.
- 4) MONOLITHIC POUR IS ALLOWED AT CONTRACTOR'S DISCRETION.
- 5) DEVELOP AND MAINTAIN SITE GRADES WHICH WILL RAPIDLY DRAIN SURFACE AND ROOF RUN-OFF AWAY FROM FOUNDATION.
- 6) FOOTINGS HAVE BEEN DESIGNED FOR A MINIMUM SOIL PRESSURE OF 2500 PSF. IT WILL BE THE RESPONSIBILITY OF OTHERS TO VERIFY THIS VALUE.
- 7) WHERE REINFORCING BARS ARE SHOWN CONTINUOUS, LAP SPLICE BARS 40 DIAMETERS.
- 8) APPROACHES TO BE A COMMON PLANE WITHIN 1/4".

- APPROACH THICKNESS MAY BE 10" MINIMUM WHERE ALLOWED BY STATE REGULATIONS
- FOUNDATION MUST EXTEND A MINIMUM OF 12" BELOW THE FROST PENETRATION LINE


DESIGNED BY DATE S. JOHNSON 03/03/2017		DRAWN BY DATE S. JOHNSON 03/03/2017		PIER APPROVAL DATE S. JOHNSON 03/30/2017		
TREATMENT NONE		THIS DRAWING AND INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC. - HEREINAFTER REFERRED TO AS RLWS. IT MAY BE USED ONLY FOR RLWS' PROPOSAL AND/OR ITS CUSTOMER'S ORDERS. IT SHALL NOT BE DISCLOSED OR COPIED WITHOUT RLWS SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.		UNLESS OTHERWISE SPECIFIED UNITS TO BE INCHES ALL THREADS TO BE CLASS 2 AFTER TREATMENT		
NUMBER OF CRANES: 		TOLERANCES DRAWINGS TOLERANCES UNLESS OTHERWISE SPECIFIED .XX: ± .XXX: ± ✓ ANGLE: ±		DESCRIPTION FOUNDATION, CONCRETE PIER 70' X 11' ATV SERIES TRUCK SCALE		
MINIMUM CRANE CAPACITY: 		ESTIMATED WEIGHT (POUNDS) ✓		SCALE 1:45 THIRD ANGLE PROJECTION 		
				SHEET 1 OF 3		MATERIAL 182152
						REV A

REBAR SCHEDULE				
BAL. NO.	QUANTITY	LENGTH (FT.-IN.)	DESCRIPTION	WEIGHT
A	30	9' 6"	# 4 @ 12 O.C.	190
B	22	13' 6"	# 4 @ 12 O.C.	198
C	30	1' 11"	# 4 @ 12 O.C.	38
D	30	4' 0"	# 4 @ 12 O.C.	80
E	26	13' 6"	# 4 @ 4 O.C.	234
F	30	2' 6"	# 4 @ 12 O.C.	50
G	18	13' 6"	# 4 @ 4 O.C.	162
CLEANOUT SCHEDULE				
H	7	18' 3"	# 4 @ 24 O.C.	85
J	7	21' 6"	# 4 @ 24 O.C.	101
K	7	18' 4"	# 4 @ 24 O.C.	86
L	31	13' 6"	# 4 @ 24 O.C.	280
TOTAL WEIGHT OF REBAR (LBS.)				1505
TOTAL LENGTH OF REBAR (FT.)				2254
WIRE MESH		6 X 6-10 GA.		813 SQ FT

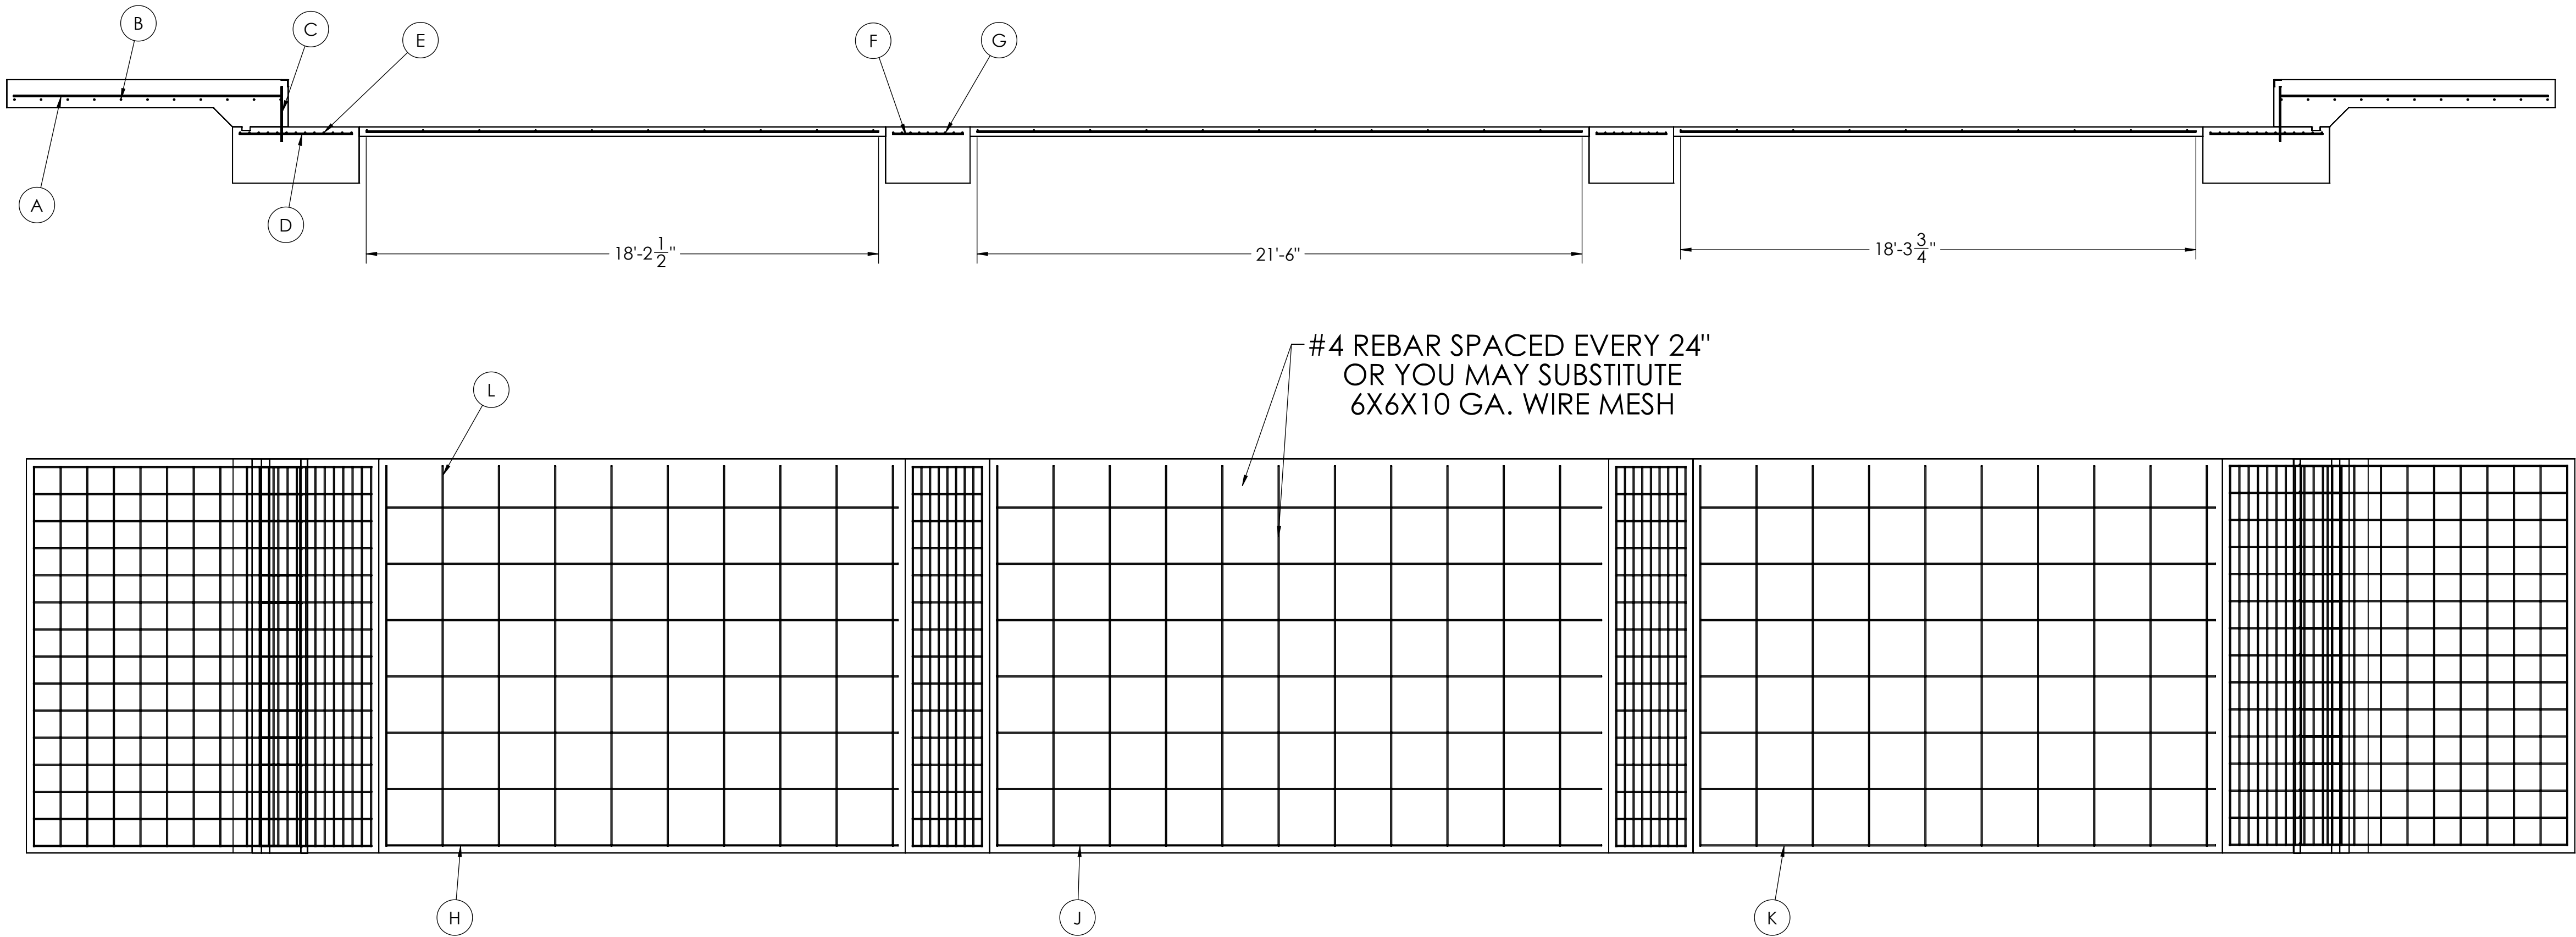


APPROACH STANDARD VIEWS


NOTES: 1) LEFT AND RIGHT APPROACHES ARE MIRROR IMAGES OF EACH OTHER AND CONTAIN AN IDENTICAL PART LIST

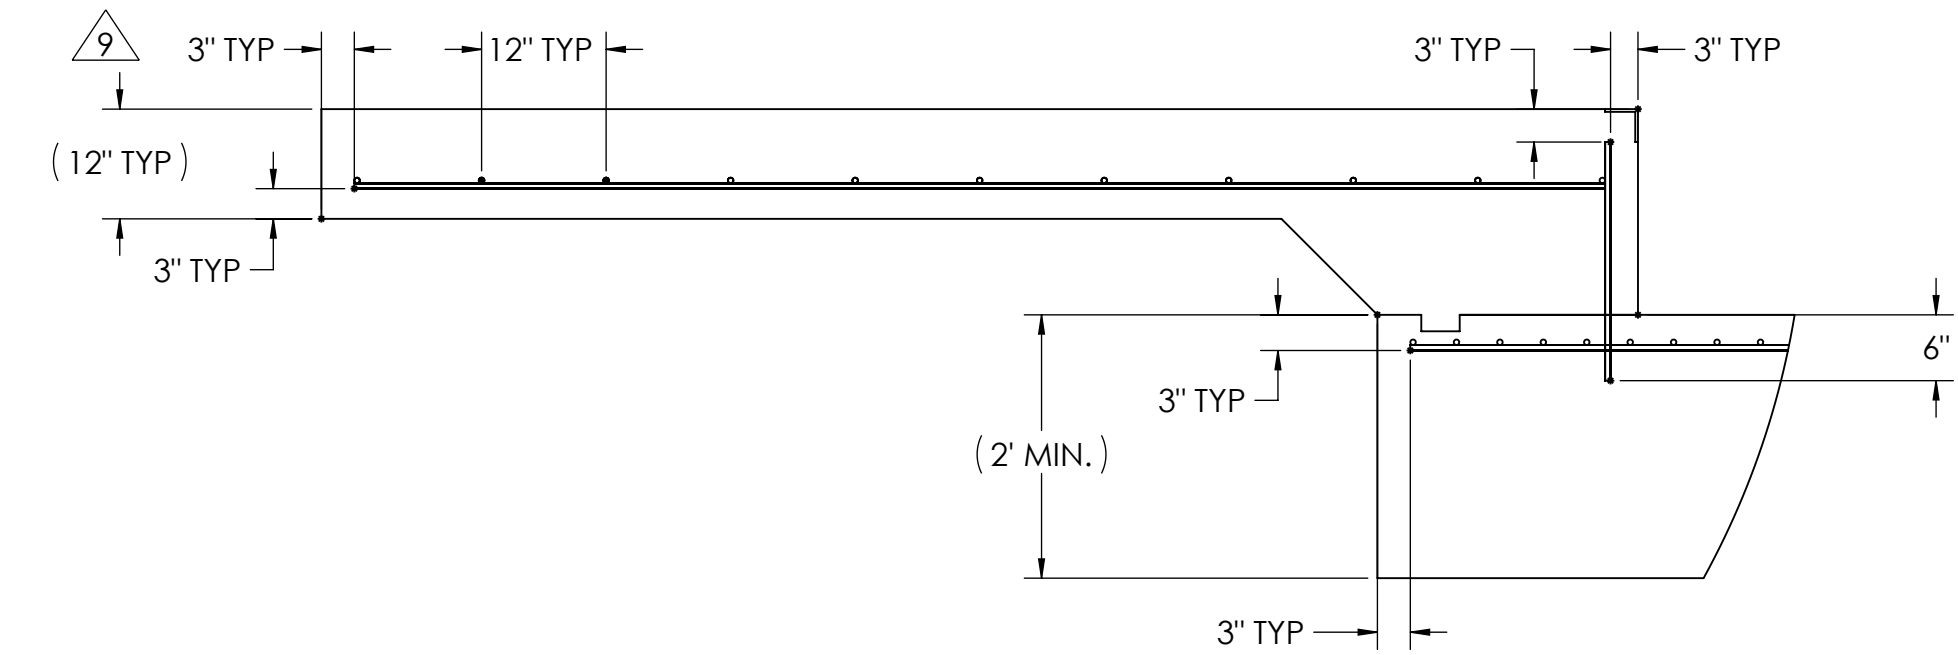

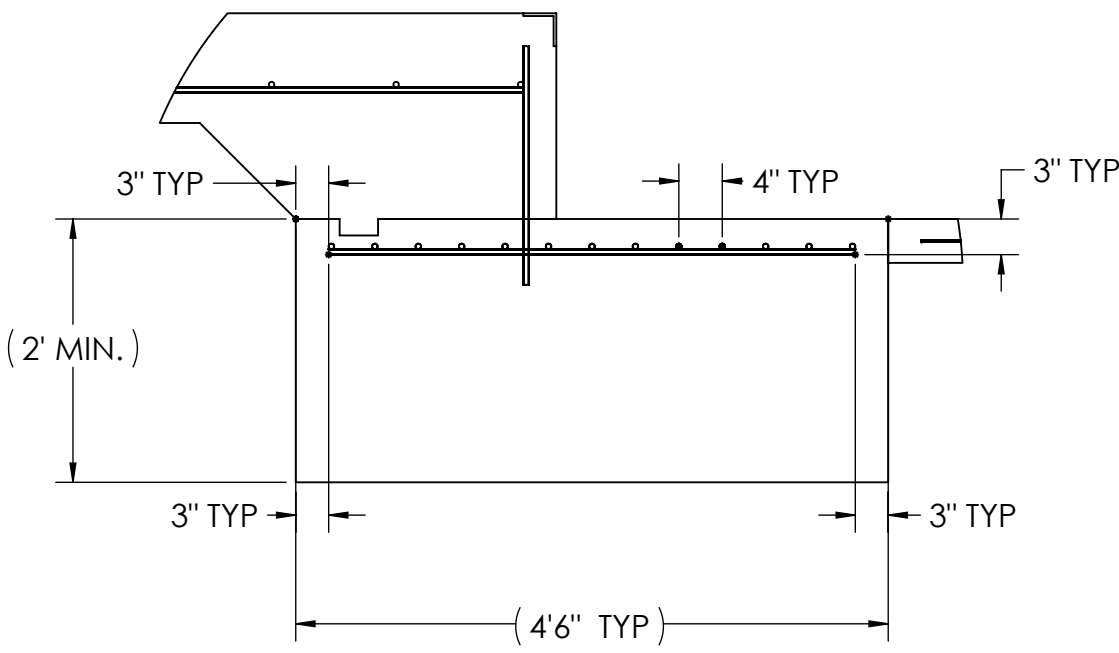


APPROACH PIER STANDARD VIEWS

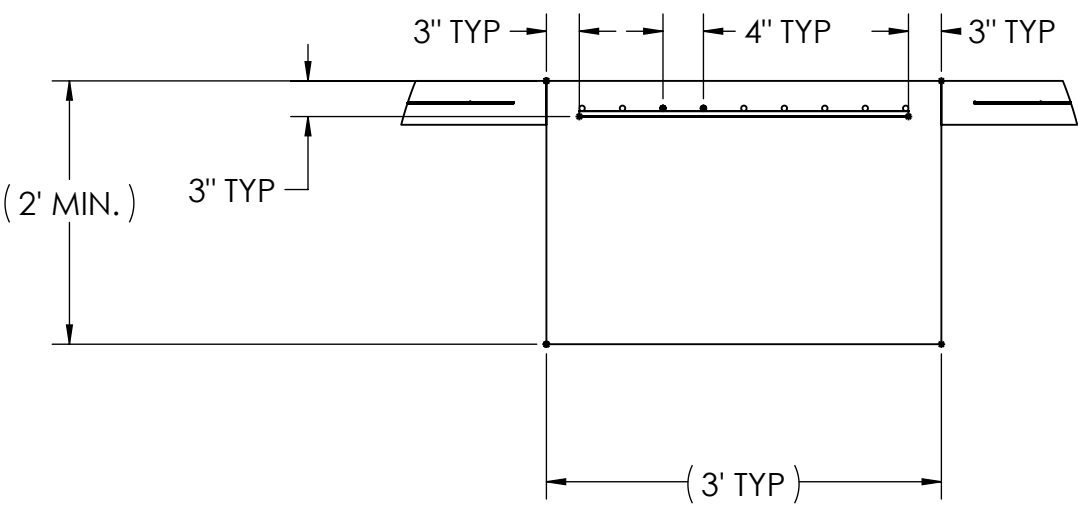

PIER STANDARD VIEWS



DESIGNED BY DATE S. JOHNSON 03/03/2017		DRAWN BY DATE S. JOHNSON 03/03/2017		FIELD ERECT DATE S. JOHNSON 03/03/2017			
TREATMENT NONE		THIS DRAWING AND INFORMATION CONTAINED HEREIN IS AND REMAINS THE PROPERTY OF RICE LAKE WEIGHING SYSTEMS INC. HEREINAFTER REFERRED TO AS RLS. IT MAY BE USED FOR THE RLS "PROPOSAL" AND/OR ITS CUSTOMER'S INFORMATION. IT SHALL NOT BE REPRODUCED OR COPIED WITHOUT RLS'S SPECIFIC WRITTEN CONSENT AND SHALL BE IMMEDIATELY RETURNED UPON REQUEST.		UNLESS OTHERWISE SPECIFIED UNITS TO BE IN INCHES ALL THREADS TO BE CLASS 2 ALL DIMENSIONS APPLICABLE AFTER TREATMENT			
NUMBER OF CRANES MINIMUM CRANE CAPACITY (ESTIMATED WEIGHT POINTS)		 DO NOT SCALE DRAWING SURFACE FINISH ✓ ANGLE: ±		TOLERANCES DRAWING TOLERANCES UNLESS OTHERWISE SPECIFIED .XX; ± .XXX; ± ANGLE: ±		DESCRIPTION FOUNDATION, CONCRETE PIER 70' x 11' ATV SERIES TRUCK SCALE	
				SCALE 1:48		SHEET 3 OF 3	
				BIRD ANGLE PROJECTION 		MATERIAL 182152	
				P/N 182152		REV A	